


Cord Connectors

Specification Grade
Alloy Steel, Aluminum, Stainless
Made in the USA



*Why Aren't Your Cables
Wearing the BEST?*

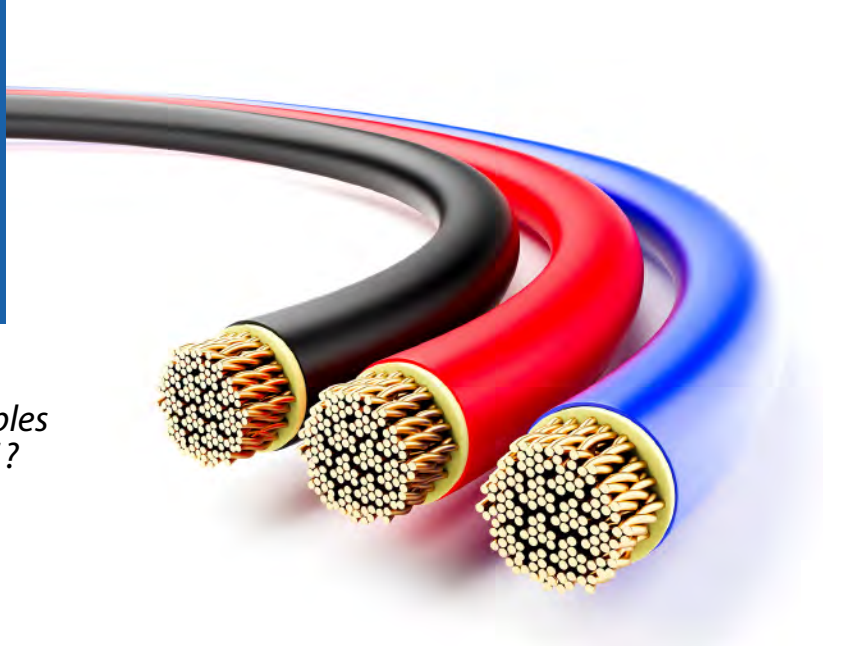

**STOP USING OUTDATED CORD CONNECTORS AND
CONNECT WITH THE BEST!**

AMFICO SPEC-grade Strain Relief Cord Grips are Guaranteed to:

- Prevent Cable Pullout
- Control Arc Of Bend
- Provide a Tight Seal Against the Toughest Elements
 - Dirt , Grease, and Sludge
 - Liquids
 - Moisture
 - Oils
 - Coolants

Create a More Secure Connection
Save Time on Every Installation



*Full Range of Cord Connectors
to Meet the Most Demanding Conditions.*

AMERICAN FITTINGS
Corporation



Manufactured in the USA Since 1946

t: 800.221.5268
amftgs.com

Fair Lawn, New Jersey

© 2017 042017.1 CG





Since 1946

AMFICO Cord Grip Connectors

The Superior Choice in Liquid Tight Strain Relief Protection

All AMFICO Strain Relief Cord Connectors Will:

Allow You to Choose the Correct Trade Size for a Wide Variety of Cable Types and Sizes
Prevent Cable Pullout, Designed for Your Specified Range of Cord
Control Arc of Bend to Meet Code Requirements Under Adverse Conditions
Provide a Tight Seal Against the Toughest Elements such as Dirt, Oils, and Coolants
Suitable for Neoprene, PVC Coated, Vinyl and Armored or Unarmored Cable.

Corrosion Resistant Alloy Steel Fittings Provide TWICE the STRENGTH of DIE CAST

FOCUS ON THE DETAILS

Solid Corrosion Resistant Alloy Steel Body *

Precision Machine Cut Threads - *Never Flatten, Never Cross*
Consistent Centerline to Compression Nut
Guarantees Environmentally Sealing All Cords Correctly

Color Coded Sealing Grommets

Seat Precisely in Connector Body, are Designed and Color Coded for SPECIFIC Cable Ranges.
Provides a Liquid Tight Connection.
Material Allows Cable to be Pulled Easily, Yet Holds Irregular Cable Securely

EZ-Torque Hex Design Nut

Solid Alloy Steel Precision Machined
Compression Nut, Grips Tight & Right
Vibration Resistant
Chamfered Dome Sheds Moisture



Furnished with AMFICO SPECTrum Series

Heavy Duty
Industrial Grade
Steel Locknut **Included
With SPECTrum Series**

Color Coded Sealing Washer
Included With SPECTrum Series Grips
Provides a Liquid Tight Seal When
Terminating the Connector To an
Enclosure or Equipment
Adapts Easily to Variations in
Knockout Dimensions

Precision Machined Steel Compression Ring -

Prevents Distortion of the Sealing Grommet
Exclusive Engineered Design Slips on Quickly &
Grips the Jacket of the Cable, & Uniformly Compresses
Sealing Grommet. Assures a Perfect Moisture Seal, While
Fully Preventing Pullout Under Extreme Conditions



Shown SPECTrum™ Series

Designs Available:

Standard Industrial SPEC-grade Series

SPECTrum™ Series

Furnished with Color Coded Sealing Washer &
Industrial Grade Steel Locknut

AP-SPEC Series

Low Profile Design
Unique Cord Range to Match Appleton Cord Range

NML Series

Non-Metallic Cord Connectors

UF Series

Under Ground Feeder Cable

* Materials Available:

Alloy Steel, Industrial Zinc Plated with Chromate Finish
Aluminum
Stainless Steel
Non-Metallic Nylon

Configurations Available:

Straight, 90°, 45°, Wire Mesh Strain Relief, Multi Hole Grommets, Adapters, Special Made to Order Applications

Compliances:

Certified Made in the USA

UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant





Since 1946

AMFICO Cord Grip Connectors

Dress Up Your Cords With the Best

3/8" to 2" **SPEC-grade™** Industrial and Commercial Cord Grip Connectors



SPECTrum Color Coded Furnished with Lock Nut & Sealing Ring

Extensive Cable Ranges with AMFICO Color Coded Grommets

Materials Available:

- Alloy Steel, Corrosion Resistant
- Aluminum
- Stainless Steel
- Non-Metallic Nylon

ALL Products Made in the USA Since 1946

AMFICO CG Series are for use with portable cords, including S, SO, STO, ST, SJ, SJT, SJTO and SVO.



UF Feeder



Standard SPECgrade Grade

Full Range of Wire Mesh Strain Relief Configurations Including Straights, 90° & 45°



Non-Metallic Type 6/6 Nylon



AP Spec - Appleton Range Low Profile Design

AMFICO Cord Connectors were not born on an engineer's computer screen or duplicated from a competitor's catalog. They were/are designed, crafted, and manufactured by decades of OEM, end user, and contractor input. If there was a need or want on their wish list, it was incorporated into AMFICO Fittings.

Multi-Hole Configurations



90° & 45° Connectors also Available with Wire Mesh

AMFICO **EZ Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free
Slightly Domed to Shred Liquids from the Entry



Custom Connectors Available Including PG & ISO Threads


While other cord grips stop at the standard features needed to make a connection, AMFICO ignored the memo. Our cord grips not only contain features designed for electricians and end-users, but feature the ones that maintain the American integrity of your systems. Conventional? We proudly say, "no".

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors Straight 1/2" - 1"



Since 1946

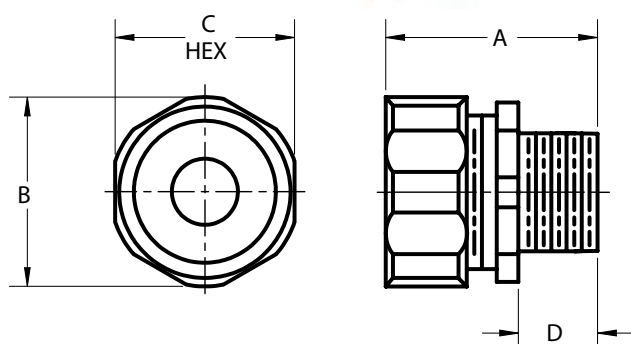

AMFICO **SPEC-grade**™ Cord Grip Connectors

Materials:

Alloy Steel with Zinc Plating Chromate Finish

Aluminum * Add AL to Suffix on Cat #

Stainless Steel ** Consult Factory for Availability

Compliances:

Certified Made in the USA

UL 514B

UL Rated Suitable for Hazardous Locations

NEMA Standard FB1

Federal Standard A-A-50553

NEC: Class I, Division 2

Class II, Divisions 1 and 2

Class III, Divisions 1 and 2

NEC 501-4(b), 505-4(a), 503-3(a)

RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts

Guaranteed to Seal Tight, Right, & Vibration Free

Cat #	Size	A Length	B Diameter	C Hex	D Length of Thread	Cable Ranges		WT/ 100
						MIN	MAX	
CG50A250	1/2"	1-5/16"	1-3/32"	1-1/32"	1/2"	.150	.250	10
CG50A350	1/2"	1-5/16"	1-3/32"	1-1/32"	1/2"	.250	.350	10
CG50A450	1/2"	1-5/16"	1-3/32"	1-1/32"	1/2"	.350	.450	10
CG50A560	1/2"	1-5/16"	1-3/32"	1-1/32"	1/2"	.450	.560	10
CG50A650	1/2"	1-5/16"	1-3/32"	1-1/32"	1/2"	.560	.650	10
CG75A250	3/4"	1-3/8"	1-3/32"	1-1/32"	17/32"	.150	.250	20
CG75A350	3/4"	1-3/8"	1-3/32"	1-1/32"	17/32"	.250	.350	20
CG75A450	3/4"	1-3/8"	1-3/32"	1-1/32"	17/32"	.350	.450	20
CG75A560	3/4"	1-3/8"	1-3/32"	1-1/32"	17/32"	.450	.560	20
CG75A650	3/4"	1-3/8"	1-3/32"	1-1/32"	17/32"	.560	.650	20
CG75B750	3/4"	1-9/16"	1-11/32"	1-9/32"	17/32"	.650	.750	20
CG75B850	3/4"	1-9/16"	1-11/32"	1-9/32"	17/32"	.750	.850	20
CG100B560	1"	1-23/32"	1-11/32"	1-9/32"	21/32"	.450	.560	30
CG100B650	1"	1-23/32"	1-11/32"	1-9/32"	21/32"	.560	.650	30
CG100B750	1"	1-23/32"	1-11/32"	1-9/32"	21/32"	.650	.750	30
CG100B850	1"	1-23/32"	1-11/32"	1-9/32"	21/32"	.750	.850	30
CG100C950	1"	1-25/32"	1-5/8"	1-9/16"	21/32"	.850	.950	30
CG100C1050	1"	1-25/32"	1-5/8"	1-9/16"	21/32"	.950	1.050	30


Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors Straight 1 1/4 - 2"



Since 1946

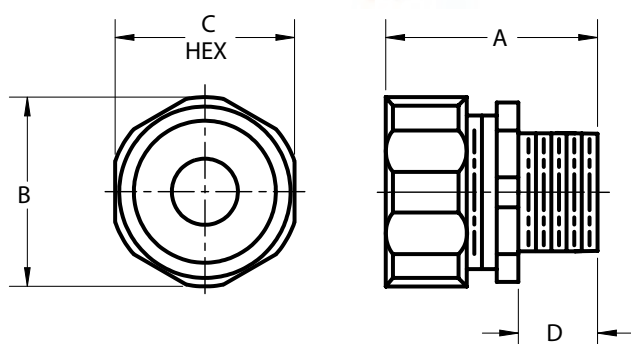

AMFICO **SPEC-grade**™ Cord Grip Connectors

Materials:

Alloy Steel with Zinc Plating Chromate Finish

Aluminum * Add AL to Suffix on Cat #

Stainless Steel ** Consult Factory for Availability

Compliances:

Certified Made in the USA

UL 514B

UL Rated Suitable for Hazardous Locations

NEMA Standard FB1

Federal Standard A-A-50553

NEC: Class I, Division 2

Class II, Divisions 1 and 2

Class III, Divisions 1 and 2

NEC 501-4(b), 505-4(a), 503-3(a)

RoHS Compliant



Featuring

AMFICO **EZ Torque** Compression Nuts

Guaranteed to Seal Tight, Right, & Vibration Free

Cat #	Size	A Length	B Diameter	C Hex	D Length of Thread	Cable Ranges		WT/ 100
						MIN	MAX	
CG125C850	1-1/4"	1-13/16"	1-5/8"	1-9/16"	11/16"	.750	.850	45
CG125C950	1-1/4"	1-13/16"	1-5/8"	1-9/16"	11/16"	.850	.950	45
CG125D1050	1-1/4"	1-27/32"	2-1/32"	1-31/32"	11/16"	.950	1.050	45
CG125D1150	1-1/4"	1-27/32"	2-1/32"	1-31/32"	11/16"	1.050	1.150	45
CG125D1250	1-1/4"	1-27/32"	2-1/32"	1-31/32"	11/16"	1.150	1.250	45
CG125D1375	1-1/4"	1-27/32"	2-1/32"	1-31/32"	11/16"	1.250	1.375	45
CG150D1050	1-1/2"	2"	2-1/32"	1-31/32"	11/16"	.950	1.050	70
CG150D1150	1-1/2"	2"	2-1/32"	1-31/32"	11/16"	1.050	1.150	70
CG150D1250	1-1/2"	2"	2-1/32"	1-31/32"	11/16"	1.150	1.250	70
CG150D1375	1-1/2"	2"	2-1/32"	1-31/32"	11/16"	1.250	1.375	70
CG150E1500	1-1/2"	2-1/8"	2-3/8"	2-9/32"	23/32"	1.380	1.500	70
CG150E1630	1-1/2"	2-1/8"	2-3/8"	2-9/32"	23/32"	1.500	1.630	70
CG150E1750	1-1/2"	2-1/8"	2-3/8"	2-9/32"	23/32"	1.630	1.750	70
CG150E1880	1-1/2"	2-1/8"	2-3/8"	2-9/32"	23/32"	1.750	1.880	70
CG200F1380	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.250	1.380	100
CG200F1500	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.380	1.500	100
CG200F1630	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.500	1.630	100
CG200F1750	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.630	1.750	100
CG200F1810	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.690	1.810	100
CG200F1880	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.750	1.880	100
CG200F1940	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.810	1.940	100
CG200F2060	2"	2-9/32"	2-7/8"	2-25/32"	23/32"	1.940	2.060	100

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors

90° 1/2 - 1"



Since 1946



AMFICO **SPEC-grade**™ 90° Cord Grip Connectors

Materials:

Compression Nuts Alloy Steel Zinc Plated
Chromate Finish
Fitting Body MI


Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO **EZ Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

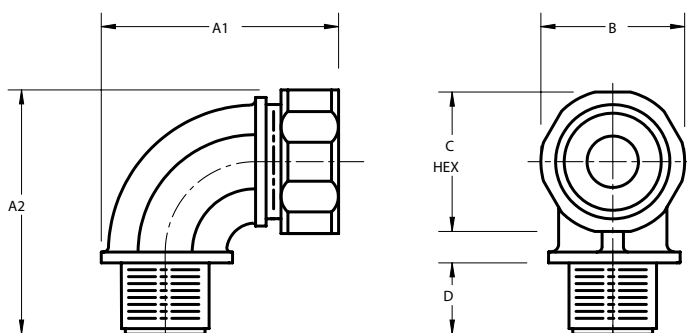

CAT #	Size	A1 Length	A2 Length	B Diameter	C Hex	D Length of Thread	WT/ 100
CG50A25090	1/2"	2-7/32"	1-25/32"	1-3/32"	1-1/32"	19/32"	26
CG50A35090	1/2"	2-7/32"	1-25/32"	1-3/32"	1-1/32"	19/32"	26
CG50A45090	1/2"	2-7/32"	1-25/32"	1-3/32"	1-1/32"	19/32"	26
CG50A56090	1/2"	2-7/32"	1-25/32"	1-3/32"	1-1/32"	19/32"	26
CG50A65090	1/2"	2-7/32"	1-25/32"	1-3/32"	1-1/32"	19/32"	26
CG75A25090	3/4"	2-1/2"	2-11/32"	1-3/32"	1-1/32"	19/32"	48
CG75A35090	3/4"	2-1/2"	2-11/32"	1-3/32"	1-1/32"	19/32"	48
CG75A45090	3/4"	2-1/2"	2-11/32"	1-3/32"	1-1/32"	19/32"	48
CG75A56090	3/4"	2-1/2"	2-11/32"	1-3/32"	1-1/32"	19/32"	48
CG75A65090	3/4"	2-1/2"	2-11/32"	1-3/32"	1-1/32"	19/32"	48
CG75B75090	3/4"	2-7/16"	2-5/16"	1-11/32"	1-9/32"	19/32"	48
CG75B85090	3/4"	2-7/16"	2-5/16"	1-11/32"	1-9/32"	19/32"	48
CG100B56090	1"	2-29/32"	2-23/32"	1-11/32"	1-9/32"	21/32"	68
CG100B65090	1"	2-29/32"	2-23/32"	1-11/32"	1-9/32"	21/32"	68
CG100B75090	1"	2-29/32"	2-23/32"	1-11/32"	1-9/32"	21/32"	68
CG100B85090	1"	2-29/32"	2-23/32"	1-11/32"	1-9/32"	21/32"	68
CG100C95090	1"	2-29/32"	2-23/32"	1-5/8"	1-9/16"	21/32"	68
CG100C105090	1"	2-29/32"	2-23/32"	1-5/8"	1-9/16"	21/32"	68

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors

45° 1/2 - 1"



Since 1946




AMFICO **SPEC-grade**™ 45° Cord Grip Connectors

Materials:

Compression Nuts Alloy Steel Zinc Plated
Chromate Finish
Fitting Body MI

Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant

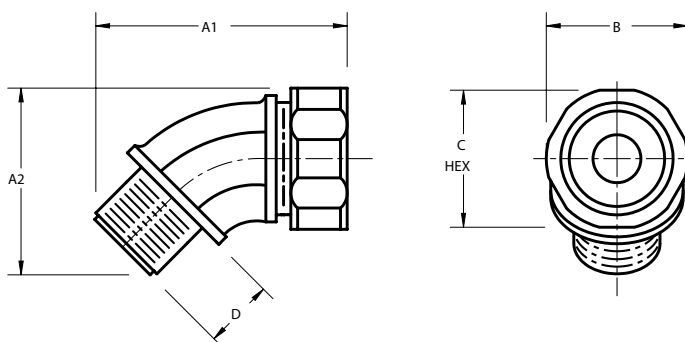

Featuring

AMFICO **EZ Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

CAT #	Size	A1 Length	A2 Length	B Diameter	C Hex	D Length of Thread	WT/ 100
CG50A25045	1/2"	2-5-16"	1-17/32"	1-3/32"	1-1/32"	19/32"	26
CG50A35045	1/2"	2-5-16"	1-17/32"	1-3/32"	1-1/32"	19/32"	26
CG50A45045	1/2"	2-5-16"	1-17/32"	1-3/32"	1-1/32"	19/32"	26
CG50A56045	1/2"	2-5-16"	1-17/32"	1-3/32"	1-1/32"	19/32"	26
CG50A65045	1/2"	2-5-16"	1-17/32"	1-3/32"	1-1/32"	19/32"	26
CG75A25045	3/4"	2-5/8"	1-13/16"	1-3/32"	1-1/32"	19/32"	48
CG75A35045	3/4"	2-5/8"	1-13/16"	1-3/32"	1-1/32"	19/32"	48
CG75A45045	3/4"	2-5/8"	1-13/16"	1-3/32"	1-1/32"	19/32"	48
CG75A56045	3/4"	2-5/8"	1-13/16"	1-3/32"	1-1/32"	19/32"	48
CG75A65045	3/4"	2-5/8"	1-13/16"	1-3/32"	1-1/32"	19/32"	48
CG75B75045	3/4"	2-1/2"	2-29/32"	1-11/32"	1-9/32"	19/32"	48
CG75B85045	3/4"	2-1/2"	2-29/32"	1-11/32"	1-9/32"	19/32"	48
CG100B56045	1"	3"	2-1/4"	1-11/32"	1-9/32"	21/32"	68
CG100B65045	1"	3"	2-1/4"	1-11/32"	1-9/32"	21/32"	68
CG100B75045	1"	3"	2-1/4"	1-11/32"	1-9/32"	21/32"	68
CG100B85045	1"	3"	2-1/4"	1-11/32"	1-9/32"	21/32"	68
CG100C95045	1"	3"	2-1/4"	1-5/8"	1-9/16"	21/32"	68
CG100C105045	1"	3"	2-1/4"	1-5/8"	1-9/16"	21/32"	68

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors Straight with Wire Mesh Strain Relief 1/2 - 1"



Since 1946

Strain Relief for Processing & Portable Equipment,
Pendant Stations, Drop Cords, Hand Tools,
Cord Sets, Construction Sites,

AMFICO **SPEC-grade**™ Cord Grip Connectors

Materials:

Fitting Body and Nut: Alloy Steel Zinc Plated
Wire Mesh: Stainless Steel
Color Coded Grommet


Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

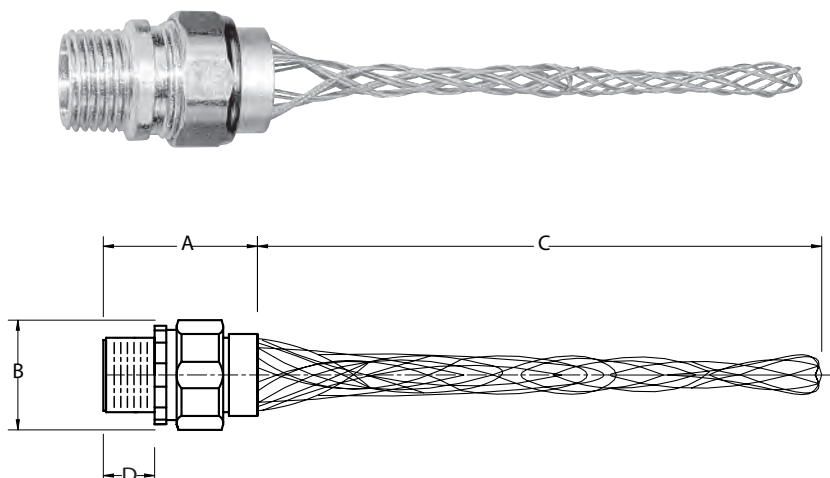

Cat #	Trade Size	A Length	B Diameter	C Mesh Length	D Length of Thread	Cable Ranges	
						MIN	MAX
CG50A250GT	1/2"	2"	1-3/32"	6"	1/2"	.150	.250
CG50A350GT	1/2"	2"	1-3/32"	6"	1/2"	.250	.350
CG50A450GT	1/2"	2"	1-3/32"	6"	1/2"	.350	.450
CG50A560GT	1/2"	2"	1-3/32"	6"	1/2"	.450	.560
CG50A650GT	1/2"	2"	1-3/32"	6"	1/2"	.560	.650
CG75A250GT	3/4"	2-1/32"	1-3/32"	6-1/2"	17/32"	.150	.250
CG75A350GT	3/4"	2-1/32"	1-3/32"	6-1/2"	17/32"	.250	.350
CG75A450GT	3/4"	2-1/32"	1-3/32"	6-1/2"	17/32"	.350	.450
CG75A560GT	3/4"	2-1/32"	1-3/32"	6-1/2"	17/32"	.450	.560
CG75A650GT	3/4"	2-1/32"	1-3/32"	6-1/2"	17/32"	.560	.650
CG75B750GT	3/4"	2-1/32"	1-11/32"	6-1/2"	17/32"	.650	.750
CG75B850GT	3/4"	2-1/32"	1-11/32"	6-1/2"	17/32"	.750	.850
CG100B560GT	1"	2-5/32"	1-11/32"	7-1/2"	21/32"	.450	.560
CG100B650GT	1"	2-5/32"	1-11/32"	7-1/2"	21/32"	.560	.650
CG100B750GT	1"	2-5/32"	1-11/32"	7-1/2"	21/32"	.650	.750
CG100B850GT	1"	2-5/32"	1-11/32"	7-1/2"	21/32"	.750	.850
CG100C950GT	1"	2-5/32"	1-5/8"	7-1/2"	21/32"	.850	.950
CG100C1050GT	1"	2-5/32"	1-5/8"	7-1/2"	21/32"	.950	1.050

Straight Wire Mesh also Available in SPECTrum Series

Other cable ranges may be available, please consult factory for the size you need.

AMFTGS.com

t: 800.221.5268

e: info@amftgs.com

© Copyright 2017 AMERICAN FITTINGS Corporation, Fair Lawn, New Jersey

Specifications Subject to Change Without Notice

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors Straight with Wire Mesh Strain Relief 1 1/4 - 2"



Since 1946

Strain Relief for Processing & Portable Equipment,
Pendant Stations, Drop Cords, Hand Tools,
Cord Sets, Construction Sites,

AMFICO **SPEC-grade**™ Cord Grip Connectors

Materials:

Fitting Body and Nut: Alloy Steel Zinc Plated
Wire Mesh: Stainless Steel
Color Coded Grommet


Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

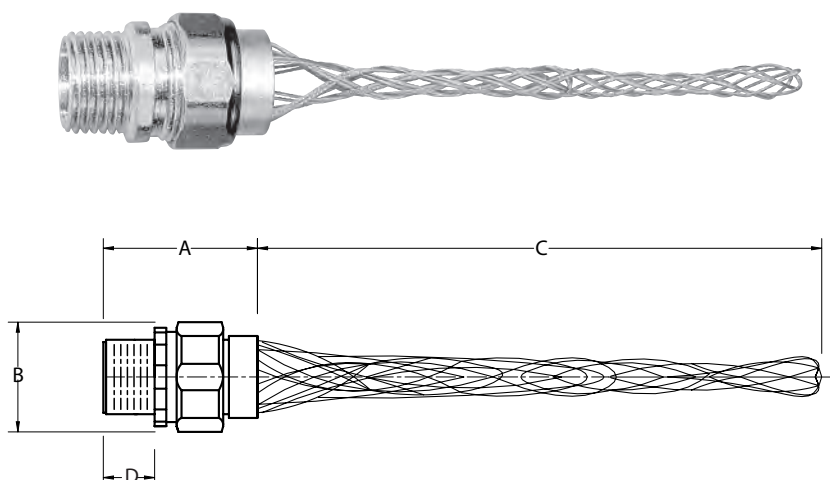

Cat #	Trade Size	A Length	B Diameter	C Mesh Length	D Length of Thread	Cable Ranges	
						MIN	MAX
CG125C850GT	1-1/4"	2-3/32"	1-5/8"	10"	11/16"	.750	.850
CG125C950GT	1-1/4"	2-3/32"	1-5/8"	9-1/2"	11/16"	.850	.950
CG125D1050GT	1-1/4"	2-1/4"	2-1/32"	9-1/2"	11/16"	.950	1.050
CG125D1150GT	1-1/4"	2-1/4"	2-1/32"	10-1/2"	11/16"	1.050	1.150
CG125D1250GT	1-1/4"	2-1/4"	2-1/32"	10-1/2"	11/16"	1.150	1.250
CG125D1375GT	1-1/4"	2-1/4"	2-1/32"	12"	11/16"	1.250	1.375
CG150D1050GT	1-1/2"	2-13/32"	2-1/32"	9-1/2"	11/16"	.950	1.050
CG150D1150GT	1-1/2"	2-13/32"	2-1/32"	10-1/2"	11/16"	1.050	1.150
CG150D1250GT	1-1/2"	2-13/32"	2-1/32"	10-1/2"	11/16"	1.150	1.250
CG150D1375GT	1-1/2"	2-13/32"	2-1/32"	12"	11/16"	1.250	1.375
CG150E1500GT	1-1/2"	2-1/2"	2-3/8"	12-1/2"	23/32"	1.380	1.500
CG150E1630GT	1-1/2"	2-1/2"	2-3/8"	12-1/2"	23/32"	1.500	1.630
CG150E1750GT	1-1/2"	2-1/2"	2-3/8"	12-1/2"	23/32"	1.630	1.750
CG150E1880GT	1-1/2"	2-1/2"	2-3/8"	12-1/2"	23/32"	1.750	1.880
CG200F1380GT	2"	2-21/32"	2-7/8"	12"	23/32"	1.250	1.380
CG200F1500GT	2"	2-21/32"	2-7/8"	13"	23/32"	1.380	1.500
CG200F1630GT	2"	2-21/32"	2-7/8"	14"	23/32"	1.500	1.630
CG200F1750GT	2"	2-21/32"	2-7/8"	15"	23/32"	1.630	1.750
CG200F1810GT	2"	2-21/32"	2-7/8"	15"	23/32"	1.690	1.810
CG200F1880GT	2"	2-21/32"	2-7/8"	12-1/2"	23/32"	1.750	1.880
CG200F1940GT	2"	2-21/32"	2-7/8"	14-1/2"	23/32"	1.810	1.940
CG200F2060GT	2"	2-21/32"	2-7/8"	15"	23/32"	1.940	2.060

Straight Wire Mesh also Available in SPECtrum Series

Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors * 90° with Wire Mesh Strain Relief 1/2 - 1"



Since 1946

Strain Relief for Processing & Portable Equipment,
Pendant Stations, Drop Cords, Hand Tools,
Cord Sets, Construction Sites

AMFICO **SPEC-grade**™ Cord Grip Connectors

Materials:

Fitting Body Malleable Iron with Alloy Steel Nut
Wire Mesh: Stainless Steel
Color Coded Grommet


Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

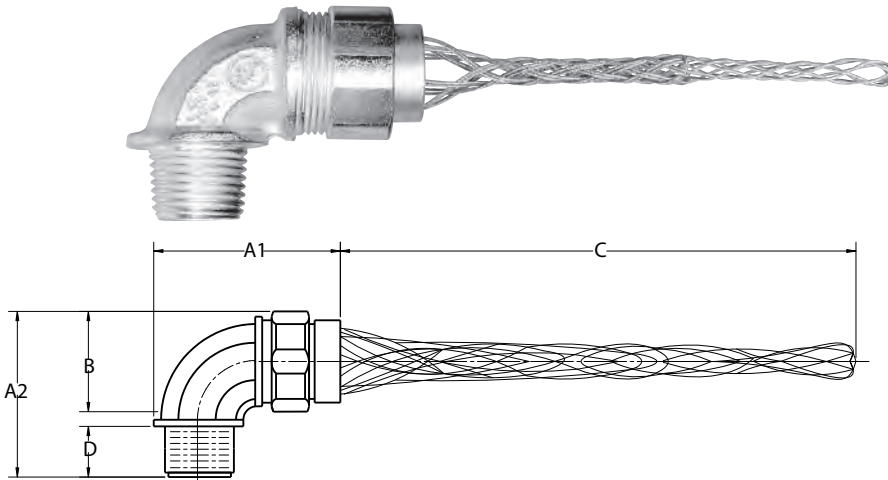

Cat #	Trade Size	A1 Length	A2 Length	B Nut Diameter	C Mesh Length	D Length of Thread	Cable Ranges	
							MIN	MAX
CG50A25090GT	1/2"	2-3/4"	1-7/8"	1-3/32"	6"	19/32"	.150	.250
CG50A35090GT	1/2"	2-3/4"	1-7/8"	1-3/32"	6"	19/32"	.250	.350
CG50A45090GT	1/2"	2-3/4"	1-7/8"	1-3/32"	6"	19/32"	.350	.450
CG50A56090GT	1/2"	2-3/4"	1-7/8"	1-3/32"	6"	19/32"	.450	.560
CG50A65090GT	1/2"	2-3/4"	1-7/8"	1-3/32"	6"	19/32"	.560	.650
CG75A25090GT	3/4"	3-1/32"	2-1/4"	1-3/32"	6-1/2"	19/32"	.150	.250
CG75A35090GT	3/4"	3-1/32"	2-1/4"	1-3/32"	6-1/2"	19/32"	.250	.350
CG75A45090GT	3/4"	3-1/32"	2-1/4"	1-3/32"	6-1/2"	19/32"	.350	.450
CG75A56090GT	3/4"	3-1/32"	2-1/4"	1-3/32"	6-1/2"	19/32"	.450	.560
CG75A65090GT	3/4"	3-1/32"	2-1/4"	1-3/32"	6-1/2"	19/32"	.560	.650
CG75B75090GT	3/4"	3-1/32"	2-1/4"	1-11/32"	6-1/2"	19/32"	.650	.750
CG75B85090GT	3/4"	3-1/32"	2-1/4"	1-11/32"	6-1/2"	19/32"	.750	.850
CG100B56090GT	1"	3-1/2"	2-3/4"	1-11/32"	7-1/2"	21/32"	.450	.560
CG100B65090GT	1"	3-1/2"	2-3/4"	1-11/32"	7-1/2"	21/32"	.560	.650
CG100B75090GT	1"	3-1/2"	2-3/4"	1-11/32"	7-1/2"	21/32"	.650	.750
CG100B85090GT	1"	3-1/2"	2-3/4"	1-11/32"	7-1/2"	21/32"	.750	.850
CG100C95090GT	1"	3-1/2"	2-3/4"	1-5/8"	7-1/2"	21/32"	.850	.950
CG100C105090GT	1"	3-1/2"	2-3/4"	1-5/8"	7-1/2"	21/32"	.950	1.050

Wire Mesh also Available in **SPECTrum** Series

Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

Standard Industrial Grade Cord Grip Connectors * 45° with Wire Mesh Strain Relief 1/2 - 1"



Since 1946

Strain Relief for Processing & Portable Equipment,
Pendant Stations, Drop Cords, Hand Tools,
Cord Sets, Construction Sites

AMFICO **SPEC-grade**™ Cord Grip Connectors

Materials:

Fitting Body Malleable Iron with Alloy Steel Nut
Wire Mesh: Stainless Steel
Color Coded Grommet


Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant-



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

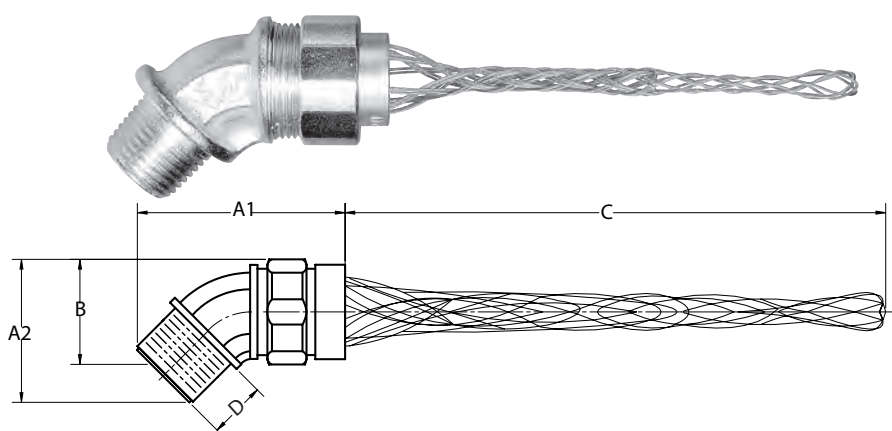

Cat #	Trade Size	A1 Length	A2 Length	B Nut Diameter	C Mesh Length	D Length of Thread	Cable Ranges	
							MIN	MAX
CG50A25045GT	1/2"	2-1/4"	1-11/16"	1-3/32"	4-1/2"	19/32"	.150	.250
CG50A35045GT	1/2"	2-1/4"	1-11/16"	1-3/32"	5-1/2"	19/32"	.250	.350
CG50A45045GT	1/2"	2-1/4"	1-11/16"	1-3/32"	4-1/2"	19/32"	.350	.450
CG50A56045GT	1/2"	2-1/4"	1-11/16"	1-3/32"	7"	19/32"	.450	.560
CG50A65045GT	1/2"	2-1/4"	1-11/16"	1-3/32"	7-1/2"	19/32"	.560	.650
CG75A25045GT	3/4"	2-1/2"	1-31/32"	1-3/32"	4-1/2"	19/32"	.150	.250
CG75A35045GT	3/4"	2-1/2"	1-31/32"	1-3/32"	5-1/2"	19/32"	.250	.350
CG75A45045GT	3/4"	2-1/2"	1-31/32"	1-3/32"	4-1/2"	19/32"	.350	.450
CG75A56045GT	3/4"	2-1/2"	1-31/32"	1-3/32"	7"	19/32"	.450	.560
CG75A65045GT	3/4"	2-1/2"	1-31/32"	1-3/32"	7-1/2"	19/32"	.560	.650
CG75B75045GT	3/4"	2-1/2"	1-31/32"	1-11/32"	9"	19/32"	.650	.750
CG75B85045GT	3/4"	2-1/2"	1-31/32"	1-11/32"	9-1/2"	19/32"	.750	.850
CG100B56045GT	1"	2-13/16"	2-7/32"	1-11/32"	7"	21/32"	.450	.560
CG100B65045GT	1"	2-13/16"	2-7/32"	1-11/32"	7-1/2"	21/32"	.560	.650
CG100B75045GT	1"	2-13/16"	2-7/32"	1-11/32"	9"	21/32"	.650	.750
CG100B85045GT	1"	2-13/16"	2-7/32"	1-11/32"	9-1/2"	21/32"	.750	.850
CG100C95045GT	1"	2-13/16"	2-7/32"	1-5/8"	9-1/2"	21/32"	.850	.950
CG100C105045GT	1"	2-13/16"	2-7/32"	1-5/8"	9-1/2"	21/32"	.950	1.050

Wire Mesh also Available in SPECtrum Series

Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

SPECTrum™ Cord Grip Connectors Straight 1/2 - 1"






Since 1946

SPECTrum Redefines
Cable Connections



Color Coded Grommets,
SPECTrum Connectors also Include
Industrial Grade Locknut &
Color Coded Sealing Washer



AMFICO SPEC-grade™ Cord Grip Connectors

Materials:

Alloy Steel with Zinc Plating Chromate Finish
Aluminum * Add AL to Suffix on Cat #
Stainless Steel ** Consult Factory for Availability
Furnished with
Steel Locknut and Color Coded Sealing Washer

Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

Cat. #	Trade Size	Cable Range		'A' Length	'B' Diameter	'C' Hex	'D' Length	WT/ 100
		Min	Max					
CG1	1/2"	.150	.250	1-5/16"	1-1/32"	1-3/32"	1/2"	12
CG2	1/2"	.250	.350	1-5/16"	1-1/32"	1-3/32"	1/2"	12
CG3	1/2"	.350	.450	1-5/16"	1-1/32"	1-3/32"	1/2"	12
CG4	1/2"	.450	.560	1-5/16"	1-1/32"	1-3/32"	1/2"	12
CG5	1/2"	.560	.650	1-5/16"	1-1/32"	1-3/32"	1/2"	12
CG6	3/4"	.150	.250	1-5/16"	1-1/32"	1-3/32"	1/2"	16
CG7	3/4"	.250	.350	1-5/16"	1-1/32"	1-3/32"	1/2"	16
CG8	3/4"	.350	.450	1-5/16"	1-1/32"	1-3/32"	1/2"	16
CG9	3/4"	.450	.560	1-5/16"	1-1/32"	1-3/32"	1/2"	16
CG10	3/4"	.560	.650	1-5/16"	1-1/32"	1-3/32"	1/2"	16
CG11	3/4"	.650	.750	1-9/16"	1-9/32"	1-5/16"	17/32"	19
CG12	3/4"	.750	.850	1-9/16"	1-9/32"	1-5/16"	17/32"	19
CG13	1"	.450	.560	1-3/4"	1-9/32"	1-5/16"	5/8"	28
CG14	1"	.560	.650	1-3/4"	1-9/32"	1-5/16"	5/8"	28
CG15	1"	.650	.750	1-3/4"	1-9/32"	1-5/16"	5/8"	28
CG16	1"	.750	.850	1-3/4"	1-9/32"	1-5/16"	5/8"	28
CG17	1"	.850	.950	1-7/8"	1-9/16"	1-5/8"	11/16"	28
CG18	1"	.950	1.050	1-7/8"	1-9/16"	1-5/8"	11/16"	28

Wire Mesh Strain Relief also Available in AMFICO SPECTrum Range of Products

Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

SPECTrum™ Cord Grip Connectors Straight 1 1/4 - 2"






Since 1946

SPECTrum Redefines
Cable Connections



Color Coded Grommets,
SPECTrum Connectors also Include
Industrial Grade Locknut &
Color Coded Sealing Washer



AMFICO SPEC-grade™ Cord Grip Connectors

Materials:

Alloy Steel with Zinc Plating Chromate Finish
Aluminum * Add AL to Suffix on Cat #
Stainless Steel ** Consult Factory for Availability
Furnished with
Steel Locknut and Color Coded Sealing Washer

Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

Cat. #	Trade Size	Cable Range		'A' Length	'B' Diameter	'C' Hex	'D' Length	WT/ 100
		Min	Max					
CG19	1-1/4"	.750	.850	1-15/16"	1-9/16"	1-5/8"	11/16"	48
CG20	1-1/4"	.850	.950	1-15/16"	1-9/16"	1-5/8"	11/16"	48
CG21	1-1/4"	.950	1.050	1-15/16"	1-15/16"	2-1/32"	11/16"	48
CG22	1-1/4"	1.050	1.150	1-15/16"	1-15/16"	2-1/32"	11/16"	48
CG23	1-1/4"	1.150	1.250	1-15/16"	1-15/16"	2-1/32"	11/16"	48
CG24	1-1/4"	1.250	1.375	1-15/16"	1-15/16"	2-1/32"	11/16"	48
CG25	1-1/2"	.950	1.050	2"	1-15/16"	2-1/32"	11/16"	70
CG26	1-1/2"	1.050	1.150	2"	1-15/16"	2-1/32"	11/16"	70
CG27	1-1/2"	1.150	1.250	2"	1-15/16"	2-1/32"	11/16"	70
CG28	1-1/2"	1.250	1.375	2"	1-15/16"	2-1/32"	11/16"	70
CG29	1-1/2"	1.380	1.500	2-5/16"	2-9/32"	2-3/8"	23/32"	65
CG30	1-1/2"	1.500	1.630	2-5/16"	2-9/32"	2-3/8"	23/32"	65
CG31	1-1/2"	1.630	1.750	2-5/16"	2-9/32"	2-3/8"	23/32"	65
CG32	1-1/2"	1.750	1.880	2-5/16"	2-9/32"	2-3/8"	23/32"	65
CG33	2"	1.250	1.380	2-7/16"	2-25/32"	2-7/8"	3/4"	109
CG34	2"	1.380	1.500	2-7/16"	2-25/32"	2-7/8"	3/4"	109
CG35	2"	1.500	1.630	2-7/16"	2-25/32"	2-7/8"	3/4"	109
CG36	2"	1.630	1.750	2-7/16"	2-25/32"	2-7/8"	3/4"	109
CG37	2"	1.690	1.810	2-7/16"	2-25/32"	2-7/8"	3/4"	109
CG38	2"	1.750	1.880	2-7/16"	2-25/32"	2-7/8"	3/4"	109
CG39	2"	1.810	1.940	2-7/16"	2-25/32"	2-7/8"	3/4"	109
CG40	2"	1.940	2.060	2-7/16"	2-25/32"	2-7/8"	3/4"	109

Wire Mesh Strain Relief also Available in AMFICO SPECTrum Range of Products

Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

SPECTrum™ Cord Grip Connectors

90° 1/2 - 1"




Since 1946

SPECTrum Redefines
Cable Connections



Color Coded Grommets,
SPECTrum Connectors also Include
Industrial Grade Locknut &
Color Coded Sealing Washer

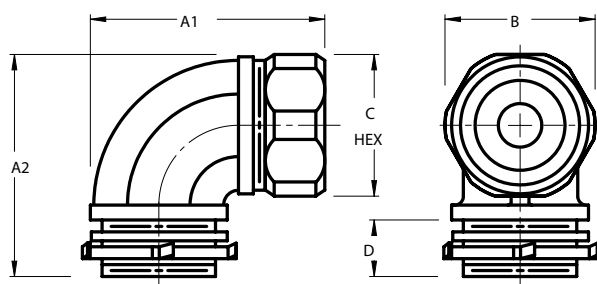

AMFICO SPEC-grade™ 90° Cord Grip Connectors

Materials:

Compression Nuts Alloy Steel
Fitting Body MI
Furnished with
Steel Locknut and Color Coded Sealing Washer

Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

Cat #	Trade Size	Cable Range		'A1' Length	'A2' Length	'B' Diameter	'C' Hex	'D' Length	WT/ 100
		MIN	MAX						
CG190	1/2"	.150	.250	2-1/4"	1-13/16"	1-1/32"	1-3/32"	5/8"	26
CG290	1/2"	.250	.350	2-1/4"	1-13/16"	1-1/32"	1-3/32"	5/8"	26
CG390	1/2"	.350	.450	2-1/4"	1-13/16"	1-1/32"	1-3/32"	5/8"	26
CG490	1/2"	.450	.560	2-1/4"	1-13/16"	1-1/32"	1-3/32"	5/8"	26
CG590	1/2"	.560	.650	2-1/4"	1-13/16"	1-1/32"	1-3/32"	5/8"	26
CG690	3/4"	.150	.250	2-17/32"	2-5/16"	1-1/32"	1-3/32"	21/32"	48
CG790	3/4"	.250	.350	2-17/32"	2-5/16"	1-1/32"	1-3/32"	21/32"	48
CG890	3/4"	.350	.450	2-17/32"	2-5/16"	1-1/32"	1-3/32"	21/32"	48
CG990	3/4"	.450	.560	2-17/32"	2-5/16"	1-1/32"	1-3/32"	21/32"	48
CG1090	3/4"	.560	.650	2-17/32"	2-5/16"	1-1/32"	1-3/32"	21/32"	48
CG1190	3/4"	.650	.750	2-7/16"	2-5/16"	1-9/32"	1-5/16"	21/32"	48
CG1290	3/4"	.750	.850	2-7/16"	2-5/16"	1-9/32"	1-5/16"	21/32"	48
CG1390	1"	.450	.560	2-29/32"	2-3/4"	1-9/32"	1-5/16"	23/32"	68
CG1490	1"	.560	.650	2-29/32"	2-3/4"	1-9/32"	1-5/16"	23/32"	68
CG1590	1"	.650	.750	2-29/32"	2-3/4"	1-9/32"	1-5/16"	23/32"	68
CG1690	1"	.750	.850	2-29/32"	2-3/4"	1-9/32"	1-5/16"	23/32"	68
CG1790	1"	.850	.950	3"	2-3/4"	1-9/16"	1-5/8"	23/32"	68
CG1890	1"	.950	1.050	3"	2-3/4"	1-9/16"	1-5/8"	23/32"	68

Wire Mesh Strain Relief also Available in AMFICO SPECTrum Range of Products

Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

SPECTrum™ Cord Grip Connectors

45° 1/2 - 1"




Since 1946

SPECTrum Redefines
Cable Connections



Color Coded Grommets,
SPECTrum Connectors also Include
Industrial Grade Locknut &
Color Coded Sealing Washer

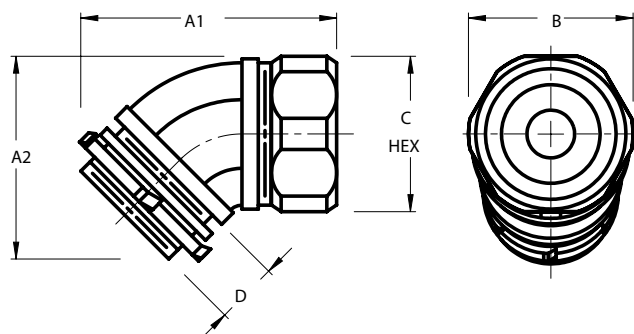

AMFICO SPEC-grade™ 45° Cord Grip Connectors

Materials:

Compression Nuts Alloy Steel
Fitting Body MI
Furnished with
Steel Locknut and Color Coded Sealing Washer

Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO EZ **Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

Cat #	Trade Size	Cable Range		'A1' Length	'A2' Length	'B' Diameter	'C' Hex	'D' Length	WT/ 100
		MIN	MAX						
CG145	1/2"	.150	.250	2-5/16"	1-17/32"	1-1/32"	1-3/32"	5/8"	26
CG245	1/2"	.250	.350	2-5/16"	1-17/32"	1-1/32"	1-3/32"	5/8"	26
CG345	1/2"	.350	.450	2-5/16"	1-17/32"	1-1/32"	1-3/32"	5/8"	26
CG445	1/2"	.450	.560	2-5/16"	1-17/32"	1-1/32"	1-3/32"	5/8"	26
CG545	1/2"	.560	.650	2-5/16"	1-17/32"	1-1/32"	1-3/32"	5/8"	26
CG645	3/4"	.150	.250	2-17/32"	1-13/16"	1-1/32"	1-3/32"	21/32"	48
CG745	3/4"	.250	.350	2-17/32"	1-13/16"	1-1/32"	1-3/32"	21/32"	48
CG845	3/4"	.350	.450	2-17/32"	1-13/16"	1-1/32"	1-3/32"	21/32"	48
CG945	3/4"	.450	.560	2-17/32"	1-13/16"	1-1/32"	1-3/32"	21/32"	48
CG1045	3/4"	.560	.650	2-17/32"	1-13/16"	1-1/32"	1-3/32"	21/32"	48
CG1145	3/4"	.650	.750	2-17/32"	1-13/16"	1-9/32"	1-5/16"	21/32"	48
CG1245	3/4"	.750	.850	2-17/32"	1-13/16"	1-9/32"	1-5/16"	21/32"	48
CG1345	1"	.450	.560	2-31/32"	2-3/32"	1-9/32"	1-5/16"	23/32"	68
CG1445	1"	.560	.650	2-31/32"	2-3/32"	1-9/32"	1-5/16"	23/32"	68
CG1545	1"	.650	.750	2-31/32"	2-3/32"	1-9/32"	1-5/16"	23/32"	68
CG1645	1"	.750	.850	2-31/32"	2-3/32"	1-9/32"	1-5/16"	23/32"	68
CG1745	1"	.850	.950	2-31/32"	2-3/32"	1-9/16"	1-5/8"	23/32"	68
CG1845	1"	.950	1.050	2-31/32"	2-3/32"	1-9/16"	1-5/8"	23/32"	68

Wire Mesh Strain Relief also Available in AMFICO SPECTrum Range of Products

Other cable ranges may be available, please consult factory for the size you need.


AMERICAN FITTINGS

AP SPEC Industrial Grade Cord Grip Connectors Straight 3/8" - 3/4"



Since 1946

Fit, Form and Functionality with
Appleton Cord Grip Range with our AP SPEC

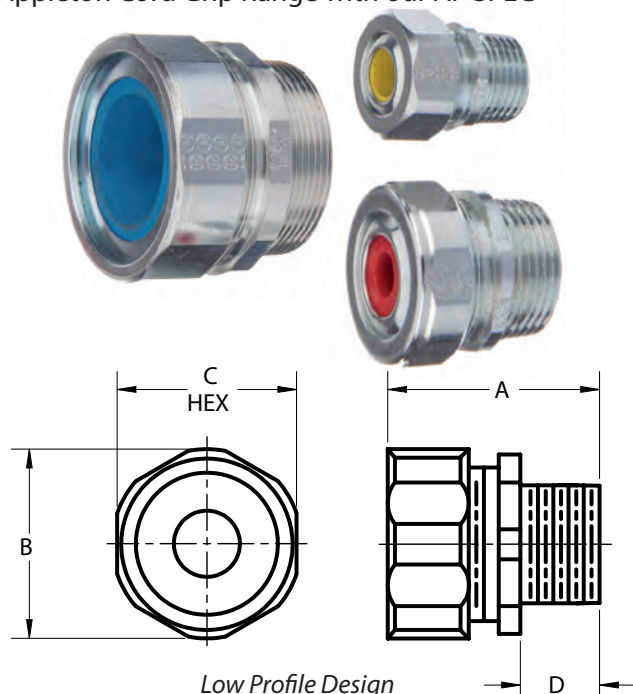

AMFICO AP SPEC™ Cord Grip Connectors

Materials:

Alloy Steel with Zinc Plating Chromate Finish

Aluminum * Add AL to Suffix of Cat #

Stainless Steel ** Consult Factory for Availability

Compliances:

Certified Made in the USA

UL 514B

UL Rated Suitable for Hazardous Locations

NEMA Standard FB1

Federal Standard A-A-50553

NEC: Class I, Division 2

Class II, Divisions 1 and 2

Class III, Divisions 1 and 2

NEC 501-4(b), 505-4(a), 503-3(a)

RoHS Compliant



Featuring

AMFICO EZ Torque Compression Nuts

Guaranteed to Seal Tight, Right, & Vibration Free

Cat. #	Size	Cable Range		'A' Length	'B' Diameter	'C' Hex	'D' Length	WT/ 100
		Min	Max					
CG1238AM	3/8"	.125	.187	1-5/16"	15/16"	7/8"	7/16"	12
CG1838AM	3/8"	.187	.312	1-5/16"	15/16"	7/8"	7/16"	12
CG3150AAM	1/2"	.312	.473	1-5/16"	15/16"	7/8"	1/2"	12
CG1250AM	1/2"	.125	.187	1-5/16"	1-3/32"	1-1/32"	1/2"	12
CG1850AM	1/2"	.187	.312	1-5/16"	1-3/32"	1-1/32"	1/2"	12
CG3150AM	1/2"	.312	.437	1-5/16"	1-3/32"	1-1/32"	1/2"	12
CG3750AM	1/2"	.375	.500	1-5/16"	1-3/32"	1-1/32"	1/2"	12
CG5050AM	1/2"	.500	.625	1-5/16"	1-3/32"	1-1/32"	1/2"	12
CG6250AM	1/2"	.625	.750	1-5/16"	1-3/32"	1-1/32"	1/2"	12
CG1275AM	3/4"	.125	.250	1-5/8"	1-5/16"	1-9/32"	17/32"	16
CG2575AM	3/4"	.250	.375	1-5/8"	1-5/16"	1-9/32"	17/32"	16
CG3775AM	3/4"	.375	.500	1-5/8"	1-5/16"	1-9/32"	17/32"	16
CG5075AM	3/4"	.500	.625	1-5/8"	1-5/16"	1-9/32"	17/32"	16
CG6275AM	3/4"	.625	.750	1-5/8"	1-5/16"	1-9/32"	17/32"	19
CG7575AM	3/4"	.750	.875	1-5/8"	1-5/16"	1-9/32"	17/32"	19

Other cable ranges may be available, please consult factory for the size you need.


AMERICAN FITTINGS

AP SPEC Industrial Grade Cord Grip Connectors Straight 1" - 2"



Since 1946

Fit, Form and Functionality with
Appleton Cord Grip Range with our AP SPEC

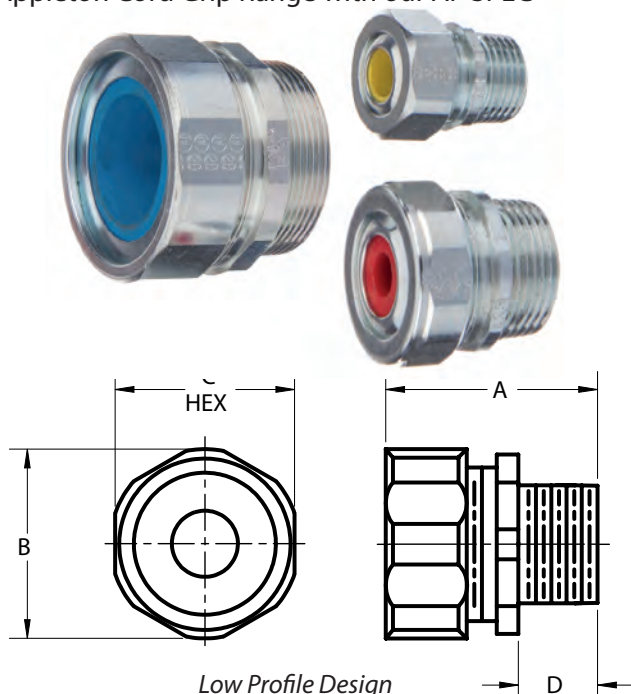

AMFICO AP SPEC™ Cord Grip Connectors

Materials:

Alloy Steel with Zinc Plating Chromate Finish

Aluminum * Add AL to Suffix of Cat #

Stainless Steel ** Consult Factory for Availability

Compliances:

Certified Made in the USA

UL 514B

UL Rated Suitable for Hazardous Locations

NEMA Standard FB1

Federal Standard A-A-50553

NEC: Class I, Division 2

Class II, Divisions 1 and 2

Class III, Divisions 1 and 2

NEC 501-4(b), 505-4(a), 503-3(a)

RoHS Compliant



Featuring

AMFICO EZ Torque Compression Nuts

Guaranteed to Seal Tight, Right, & Vibration Free

Cat. #	Size	Cable Range		'A' Length	'B' Diameter	'C' Hex	'D' Length	WT/ 100
		Min	Max					
CG37100AM	1"	.375	.500	1-3/4"	1-5/16"	1-9/32"	11/16"	28
CG50100AM	1"	.500	.625	1-3/4"	1-5/16"	1-9/32"	11/16"	28
CG62100AM	1"	.625	.750	1-3/4"	1-5/16"	1-9/32"	11/16"	28
CG75100AM	1"	.750	.875	1-3/4"	1-5/16"	1-9/32"	11/16"	28
CG87100AM	1"	.875	1.000	1-7/8"	1-5/8"	1-9/16"	11/16"	28
CG100100AM	1"	1.000	1.125	1-7/8"	1-5/8"	1-9/16"	11/16"	28
CG75125AM	1-1/4"	.750	.875	1-7/8"	1-5/8"	1-9/16"	11/16"	48
CG87125AM	1-1/4"	.875	1.000	1-7/8"	1-5/8"	1-9/16"	11/16"	48
CG100125AM	1-1/4"	1.000	1.125	1-7/8"	1-5/8"	1-9/16"	11/16"	48
CG112125AM	1-1/4"	1.125	1.250	1-7/8"	2-1/32"	1-15/16"	11/16"	48
CG125125AM	1-1/4"	1.250	1.375	1-15/16"	2-1/32"	1-15/16"	11/16"	48
CG137125AM	1-1/4"	1.375	1.500	1-15/16"	2-1/32"	1-15/16"	11/16"	48
CG115150AM	1-1/2"	1.156	1.312	2-1/4"	2-3/8"	2-9/32"	23/32"	90
CG128150AM	1-1/2"	1.281	1.531	2-1/4"	2-3/8"	2-9/32"	23/32"	90
CG153200AM	2"	1.531	1.780	2-1/2"	2-7/8"	2-25/32"	23/32"	105

Other cable ranges may be available, please consult factory for the size you need.

AMERICAN FITTINGS

Service Entrance WaterTIGHT Cord Connectors Straight 1/2 - 3/4" for Underground Feeder Cable TYPE UF




Since 1946

Twice the Strength, Durability &
Corrosion Resistance Over Die Cast



AMFICO EZ-TORQUE
Alloy Steel Compression Nut
Provides a WaterTIGHT Seal on UF cable

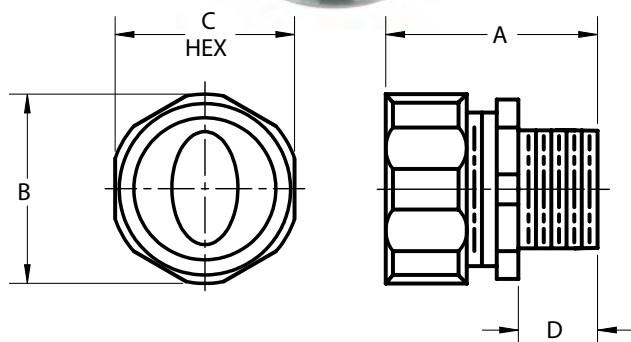

AMFICO **SPEC-grade**™ UF Cable Connector

Materials:

Alloy Steel with Zinc Plating Chromate Finish
Neoprene Grommet

Compliances:

Certified Made in the USA
UL 514B, NEMA 4x Rating **
NEMA Standard FB1
Federal Standard A-A-50553
RoHS Compliant



Allows you to connect an underground feeder (UF) cable to an electrical box or enclosure. Supports 14/3 - 10/3 UF cables, and features a low-profile design to accommodate both newer and smaller UF cables and standard-size UF cables.

Tapered NPT Threaded Male Hub

Precision Machined Threaded NPT Tapered Alloy Steel Body with Exclusive EZ-TORQUE Compression Nut All Zinc Plated with Clear Chromate Finish Provide the Ultimate in Corrosion Resistance.

Engineered Neoprene Grommet Designed for Liquid Tight Service and Protect Against Oil and Contaminants

Grommet Entry Guaranteed NEMA 4x, Not to Leak **

Solid Steel Retaining Ring Safeguards the Cable Jacket from Abrasion and Reduces the Torque Required for a Liquid Tight Seal.

Cat #	Trade Size "	A Length	B Diameter	C Hex	D Length	UF Cable Range
UF50	1/2	1 5/16	1 3/32	1 1/32	1/2	14-2, 12-2 W and WO Ground
UF5075	3/4	1 5/16	1 3/32	1 1/32	17/32	14-2, 12-2 W and WO Ground
UF75	3/4	1 3/8	1 3/32	2 1/32	17/32	14-3, 12-3, 10-3 W and WO Ground

Trade Size 1/2 and 3/4 Inch
Knock out Size 1/2 and 3/4 inch

** Attaching to an enclosure or box - when properly installed to a NEMA 4x rated enclosure with NPT threads, or installed using a sealing washer and locknut (sold separately).

AMERICAN FITTINGS


Non-Metallic WaterTIGHT Cord Connectors

Straight 1/2 - 1"



Since 1946

Avoid the Issues of Using PVC Connectors with AMFICO Type 6 Nylon Made in the USA

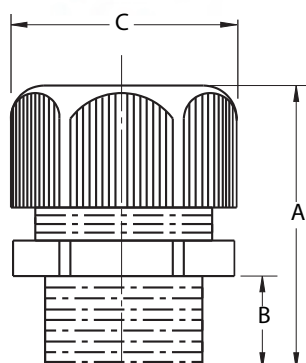

AMFICO **SPEC-grade**™ Cord Grip Connectors

Materials:

Body and Compression Nut: Type 6 Nylon
Color: Industrial Grey
Grommet: Oil Resistant Neoprene

Compliances:

Certified Made in the USA
NEMA Standard FB1
Federal Standard A-A-50553
Temperature Range: -30° to 105°C
Temperature Range Short Term: 150°C
Flame Resistance: UL 94-VO
UL Standard 514B
Zone 2, Division 2 use per Code
CUL to CSA Standard C22.2 No.18
Environmental Rating:
IP68 • NEMA 4X Watertight
RoHS Compliant



Cat #	Trade Size	Cable Range		A	B	C
		MIN	MAX			
NMCG50-1	1/2"	.170	.260	1.968"	.590"	.945"
NMCG50-2	1/2"	.236	.472	1.968"	.590"	.945"
NMCG75-1	3/4"	.250	.480	2.007"	.590"	1.299"
NMCG75-2	3/4"	.472	.709	2.007"	.590"	1.299"
NMCG100-1	1"	.470	.680	2.401"	.748"	1.653"
NMCG100-2	1"	.669	.984	2.401"	.748"	1.653"

For use with portable cords, AMFICO's NMCG Non-Metallic Series Watertight Cord Grips terminate and protect conductors from mechanical damage due to vibration and movement. Our unique neoprene grommet seals out oils, coolants, water, dust and other abusive agents. NMCG Cord Grips may be used with types S, SO, STO, SJ, SJT, SJTO and SVO portable cords.

Locknuts & Sealing Washers (Ordered Separately)

LN50 1/2" Industrial Grade Steel Locknut
LN75 3/4" Industrial Grade Steel Locknut
LN100 1" Industrial Grade Steel Locknut



*For larger sizes of Locknuts & Sealing Washers
Ask for our AMFICO Accessories Brochure*

SW50 1/2" Neoprene Sealing Washer
SW75 3/4" Neoprene Sealing Washer
SW100 1" Neoprene Sealing Washer



AMERICAN FITTINGS

Specialty Cord Grip Connectors Multi Hole Grommets



Since 1946

*When You Need a Special Connector,
We Have Your Cords Covered.*



Multi Hole Grommets to Specialty Connectors,
AMFICO Can Manufacture a
Made to Order Cord Grip Connector

AMFICO **SPEC-grade**™ Cord Grip Specialty Connectors

Materials:

Alloy Steel with Zinc Plating Chromate Finish
Aluminum
Stainless Steel
Color Coded Cable Grommets

Compliances:

Certified Made in the USA
UL 514B
UL Rated Suitable for Hazardous Locations
NEMA Standard FB1
Federal Standard A-A-50553
NEC: Class I, Division 2
Class II, Divisions 1 and 2
Class III, Divisions 1 and 2
NEC 501-4(b), 505-4(a), 503-3(a)
RoHS Compliant



Featuring

AMFICO **EZ Torque** Compression Nuts
Guaranteed to Seal Tight, Right, & Vibration Free

Cat #	Trade Size"	Description
CG50A2222H	1/2	Cord Grip Connectors with 2 Holes Cable Range .150 .250
CG50A2223H	1/2	Cord Grip Connectors with 3 Holes Cable Range .150 .250
CG75A2222H	3/4	Cord Grip Connectors with 2 Holes Cable Range .150 .250
CG75A2223H	3/4	Cord Grip Connectors with 3 Holes Cable Range .150 .250

Current Stocked Connectors Shown, Other Sizes and Configurations May Be Available Consult Factory

AMERICAN FITTINGS

Industrial Grade

Wide Range Strain Relief Grips 1/2" - 2 1/2"




Since 1946

AMFICO **SPEC-grade**™ Wide Range Strain Relief



NPT Threads

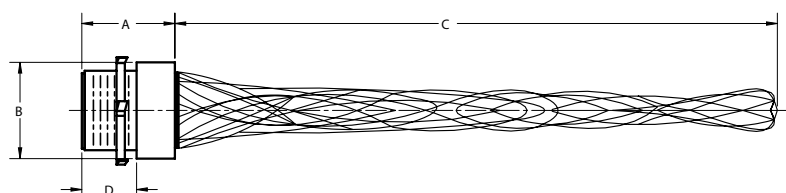

One Piece Construction for Easy Installation
Indoor Use, Dust Proof

Materials:

Fitting Body and Nut: Aluminum

Wire Mesh: Galvanized Steel

Locknut: Galvanized Steel

Compliances:

Certified Made in the USA

UL 514B

NEMA Standard FB1

Federal Standard A-A-50553

RoHS Compliant



AMFICO SR-series has a male N.P.T. tapered thread and locknut Industrial grade steel locknut allows easy attachment to enclosures up to 3/8 Inch thick.

Cat #	Size NPT	Cable Ranges		A Length	B Diameter	C Mesh Length	D Length of Thread
		MIN	MAX				
SR001	1/2"	.220	.320	15/16"	1-1/32"	4"	1/2"
SR002	1/2"	.300	.430	15/16"	1-1/32"	5-1/4"	1/2"
SR003	1/2"	.400	.540	15/16"	1-1/32"	7"	1/2"
SR004	3/4"	.520	.730	1"	1-3/8"	8-1/2"	19/32"
SR005	1"	.700	.970	1-7/32"	1-5/8"	10"	3/4"
SR006	1-1/4"	.940	1.200	1-7/16"	2-1/8"	13"	3/4"
SRB008 *	1-2"	.220	.320	1-9/16"	1-1/32"	4"	1"
SRB009 *	1-2"	.300	.430	1-9/16"	1-1/32"	5-1/4"	1"
SRB010 *	1-2"	.400	.540	1-9/16"	1-1/32"	6-3/4"	1"
SRB011 *	3/4"	.520	.730	1-9/16"	1-3/8"	8-1/2"	1"
SRB012 *	1"	.700	.970	1-7/8"	1-5/8"	10"	1-1/4"
SRB013 *	1-1/4"	.940	1.250	2-1/8"	2-1/8"	13"	1-1/4"
SRB014 *	1-1/2"	1.200	1.500	2-1/8"	2-1/4"	15-1/4"	1-1/4"
SRB015 *	2"	1.400	1.750	2-9/32"	2-25/32"	17-3/4"	1-3/8"
SRB016 *	2-1/2"	1.620	2.000	2-7/8"	3-1/4"	20-1/2"	1-1/2"
SRB017 *	2-1/2"	2.000	2.450	2-7/8"	3-1/4"	22"	1-1/2"

* Includes Insulating Bushing



AMFICO Cord Grip Connectors

Cord Connector Selection Guide

Simplify your options for AMFICO Cord Connectors using the following pages.

- 1 Select Your Trade Size [Knockout Size]
- 2 Select Your Specific Cable Range Min. to Max.
- 3 Select Desired Configuration Straight, 90°, 45° , With or Without Wire Mesh Strain Relief
- 4 Select Material Requirement , for Sstainless Steel Call Factory
- 5 Description Provided Select as Applicable With or Without Locknut and Sealing Washer
- 6 Color Coded Cord Grip is Shown
- 7 AMFICO Cat # Provided - *to see packaging and UPC Codes Go to Index Pages*

Any size, configuration, or material requirement not shown, please consult factory.

DELIVERY TIMES

AMFICO manufactures all products in our facility in New Jersey. Our ability to manufacture quickly, and ship through our Authorized Distributors throughout the USA means you get products faster than other manufacturers who source their fittings in China, India, and Mexico.

Our ADP Signature Distributor Partners throughout the USA stock a wide array of products so local stock may be readily available. Additionally we have 5 regional warehouses in key locations to service the market.

SPECIAL REQUIREMENTS

Don't see exactly what you need contact us and discuss your requirements. We have the ability to manufacture custom connectors to meet your applications.

Need to change some basic specifications on your cord connectors? No problem! Many times, you can economically modify one of our products to meet your criteria. Start with a stock product, make a modification and get them produced fast – small and large production runs work well.

GUARANTEES

All AMFICO products are guaranteed for life. So integrity and reliability are never a problem. ALL of our products receive a 100% inspection during manufacturing, assembly, and packaging. Your assurance for quality and integrity is manufactured into every connector not simply a source inspection before it is placed on the "boat" from offshore 3rd party manufacturing. *Trust One Name. . AMERICAN*



AMFICO Cord Grip Connectors

Selection Chart by Trade Size / Cord Range

Any size, configuration, or material requirement not shown, please consult factory.

S = Alloy Steel
AL = Aluminum
SS = Stainless Steel (consult factory)
90 & 45 degree =
MI with Alloy Steel Nuts

Trade Size"	Cable Range (OD)	Configuration	Material	Description	Grommet Color Code	Cat. #
1/2	Min.150-Max.222	Straight	S	Straight Industrial Cord Grip Conn.Steel USA 2 Hole Grommet	Black	CG50A2222H
1/2	Min.150-Max.222	Straight	S	Straight Industrial Cord Grip Conn.Steel USA 3 Hole Grommet	Black	CG50A2223H
1/2	Min.150-Max.250	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Red	CG1
1/2	Min.150-Max.250	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Red	CG145
1/2	Min.150-Max.250	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Red	CG190
1/2	Min.150-Max.250	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Red	CG1AL
1/2	Min.150-Max.250	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Red	CG1ALGT
1/2	Min.150-Max.250	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Red	CG50A250
1/2	Min.150-Max.250	45°	S	45° Industrial Cord Grip Conn.USA	Red	CG50A25045
1/2	Min.150-Max.250	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Red	CG50A25045GT
1/2	Min.150-Max.250	90°	S	90° Industrial Cord Grip Conn.USA	Red	CG50A25090
1/2	Min.150-Max.250	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Red	CG50A25090GT
1/2	Min.150-Max.250	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Red	CG50A250AL
1/2	Min.150-Max.250	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Red	CG50A250GT
1/2	Min.187-Max.312	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Brown	CG1850AM
1/2	Min.250-Max.350	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	White	CG2
1/2	Min.250-Max.350	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	White	CG245
1/2	Min.250-Max.350	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	White	CG290
1/2	Min.250-Max.350	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	White	CG2AL
1/2	Min.250-Max.350	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	White	CG2ALGT
1/2	Min.250-Max.350	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	White	CG50A350
1/2	Min.250-Max.350	45°	S	45° Industrial Cord Grip Conn.USA	White	CG50A35045
1/2	Min.250-Max.350	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	White	CG50A35045GT
1/2	Min.250-Max.350	90°	S	90° Industrial Cord Grip Conn.USA	White	CG50A35090
1/2	Min.250-Max.350	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	White	CG50A35090GT
1/2	Min.250-Max.350	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	White	CG50A350AL
1/2	Min.250-Max.350	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	White	CG50A350GT
1/2	Min.312-Max.437	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Yellow	CG3150AM
1/2	Min.350-Max.450	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Blue	CG3
1/2	Min.350-Max.450	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Blue	CG345
1/2	Min.350-Max.450	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Blue	CG390
1/2	Min.350-Max.450	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Blue	CG3AL
1/2	Min.350-Max.450	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Blue	CG3ALGT
1/2	Min.350-Max.450	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Blue	CG50A450
1/2	Min.350-Max.450	45°	S	45° Industrial Cord Grip Conn.USA	Blue	CG50A45045
1/2	Min.350-Max.450	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Blue	CG50A45045GT
1/2	Min.350-Max.450	90°	S	90° Industrial Cord Grip Conn.USA	Blue	CG50A45090
1/2	Min.350-Max.450	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Blue	CG50A45090GT
1/2	Min.350-Max.450	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Blue	CG50A450AL
1/2	Min.350-Max.450	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Blue	CG50A450GT
1/2	Min.375-Max.500	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Purple	CG3750AM
1/2	Min.450-Max.560	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Green	CG4
1/2	Min.450-Max.560	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Green	CG445
1/2	Min.450-Max.560	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Green	CG490
1/2	Min.450-Max.560	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Green	CG4AL
1/2	Min.450-Max.560	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Green	CG4ALGT
1/2	Min.450-Max.560	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Green	CG50A560
1/2	Min.450-Max.560	45°	S	45° Industrial Cord Grip Conn.USA	Green	CG50A56045
1/2	Min.450-Max.560	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Green	CG50A56045GT
1/2	Min.450-Max.560	90°	S	90° Industrial Cord Grip Conn.USA	Green	CG50A56090
1/2	Min.450-Max.560	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Green	CG50A56090GT
1/2	Min.450-Max.560	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Green	CG50A560AL
1/2	Min.450-Max.560	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Green	CG50A560GT
1/2	Min.500-Max.625	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Pink	CG5050AM
1/2	Min.560-Max.0.65	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Brown	CG50A65045GT
1/2	Min.560-Max.650	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Brown	CG5
1/2	Min.560-Max.650	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Brown	CG50A650
1/2	Min.560-Max.650	45°	S	45° Industrial Cord Grip Conn.USA	Brown	CG50A65045
1/2	Min.560-Max.650	90°	S	90° Industrial Cord Grip Conn.USA	Brown	CG50A65090
1/2	Min.560-Max.650	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Brown	CG50A65090GT
1/2	Min.560-Max.650	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Brown	CG50A650AL
1/2	Min.560-Max.650	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Brown	CG50A650GT
1/2	Min.560-Max.650	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Brown	CG545
1/2	Min.560-Max.650	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Brown	CG5AL
1/2	Min.560-Max.650	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Brown	CG5ALGT
1/2	Min.560-Max.0.65	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Brown	CG590
1/2	Min.625-Max.750	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Orange	CG6250AM



AMFICO Cord Grip Connectors

Selection Chart by Trade Size / Cord Range

Any size, configuration, or material requirement not shown, please consult factory.

S = Alloy Steel
AL = Aluminum
SS = Stainless Steel (consult factory)
90 & 45 degree =
MI with Alloy Steel Nuts

Trade Size"	Cable Range (OD)	Configuration	Material	Description	Grommet Color Code	Cat. #
3/4	Min.125-Max.250	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Blue	CG1275AM
3/4	Min.150-Max.222	Straight	S	Straight Industrial Cord Grip Conn.Steel USA 2 Hole Grommet	Black	CG75A2222H
3/4	Min.150-Max.222	Straight	S	Straight Industrial Cord Grip Conn.Steel USA 3 Hole Grommet	Black	CG75A2223H
3/4	Min.150-Max.250	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Red	CG6
3/4	Min.150-Max.250	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Red	CG645
3/4	Min.150-Max.250	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Red	CG690
3/4	Min.150-Max.250	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Red	CG6AL
3/4	Min.150-Max.250	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Red	CG6ALGT
3/4	Min.150-Max.250	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Red	CG75A250
3/4	Min.150-Max.250	45°	S	45° Industrial Cord Grip Conn.USA	Red	CG75A25045
3/4	Min.150-Max.250	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Red	CG75A25045GT
3/4	Min.150-Max.250	90°	S	90° Industrial Cord Grip Conn.USA	Red	CG75A25090
3/4	Min.150-Max.250	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Red	CG75A25090GT
3/4	Min.150-Max.250	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Red	CG75A250AL
3/4	Min.150-Max.250	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Red	CG75A250GT
3/4	Min.250-Max.350	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	White	CG7
3/4	Min.250-Max.350	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	White	CG745
3/4	Min.250-Max.350	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	White	CG75A350
3/4	Min.250-Max.350	45°	S	45° Industrial Cord Grip Conn.USA	White	CG75A35045
3/4	Min.250-Max.350	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	White	CG75A35045GT
3/4	Min.250-Max.350	90°	S	90° Industrial Cord Grip Conn.USA	White	CG75A35090
3/4	Min.250-Max.350	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	White	CG75A35090GT
3/4	Min.250-Max.350	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	White	CG75A350AL
3/4	Min.250-Max.350	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	White	CG75A350GT
3/4	Min.250-Max.350	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	White	CG790
3/4	Min.250-Max.350	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	White	CG7AL
3/4	Min.250-Max.350	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	White	CG7ALGT
3/4	Min.250-Max.375	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Green	CG2575AM
3/4	Min.350-Max.450	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Blue	CG75A450
3/4	Min.350-Max.450	45°	S	45° Industrial Cord Grip Conn.USA	Blue	CG75A45045
3/4	Min.350-Max.450	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Blue	CG75A45045GT
3/4	Min.350-Max.450	90°	S	90° Industrial Cord Grip Conn.USA	Blue	CG75A45090
3/4	Min.350-Max.450	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Blue	CG75A45090GT
3/4	Min.350-Max.450	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Blue	CG75A450AL
3/4	Min.350-Max.450	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Blue	CG75A450GT
3/4	Min.350-Max.450	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Blue	CG8
3/4	Min.350-Max.450	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Blue	CG845
3/4	Min.350-Max.450	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Blue	CG890
3/4	Min.350-Max.450	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Blue	CG8AL
3/4	Min.350-Max.450	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Blue	CG8ALGT
3/4	Min.375-Max.500	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Purple	CG3775AM
3/4	Min.450-Max.560	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Green	CG75A560
3/4	Min.450-Max.560	45°	S	45° Industrial Cord Grip Conn.USA	Green	CG75A56045
3/4	Min.450-Max.560	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Green	CG75A56045GT
3/4	Min.450-Max.560	90°	S	90° Industrial Cord Grip Conn.USA	Green	CG75A56090
3/4	Min.450-Max.560	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Green	CG75A56090GT
3/4	Min.450-Max.560	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Green	CG75A560AL
3/4	Min.450-Max.560	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Green	CG75A560GT
3/4	Min.450-Max.560	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Green	CG9
3/4	Min.450-Max.560	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Green	CG945
3/4	Min.450-Max.560	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Green	CG990
3/4	Min.450-Max.560	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Green	CG9AL
3/4	Min.450-Max.560	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Green	CG9ALGT
3/4	Min.500-Max.625	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Pink	CG5075AM
3/4	Min.560-Max.650	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Brown	CG10
3/4	Min.560-Max.650	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Brown	CG1045
3/4	Min.560-Max.650	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Brown	CG1090
3/4	Min.560-Max.650	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Brown	CG10AL
3/4	Min.560-Max.650	Straight Mesh Grip	AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Brown	CG10ALGT
3/4	Min.560-Max.650	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Brown	CG75A650
3/4	Min.560-Max.650	45°	S	45° Industrial Cord Grip Conn.USA	Brown	CG75A65045
3/4	Min.560-Max.650	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Brown	CG75A65045GT
3/4	Min.560-Max.650	90°	S	90° Industrial Cord Grip Conn.USA	Brown	CG75A65090
3/4	Min.560-Max.650	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Brown	CG75A65090GT
3/4	Min.560-Max.650	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Brown	CG75A650AL
3/4	Min.560-Max.650	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Brown	CG75A650GT
3/4	Min.625-Max.750	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Orange	CG6275AM



AMFICO Cord Grip Connectors

Selection Chart by Trade Size / Cord Range

Any size, configuration, or material requirement not shown, please consult factory.

S = Alloy Steel
AL = Aluminum
SS = Stainless Steel (consult factory)
90 & 45 degree =
MI with Alloy Steel Nuts

Trade Size "	Cable Range (OD)	Configuration	Material	Description	Grommet Color Code	Cat. #
3/4	Min.650-Max.750	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Yellow	CG11
3/4	Min.650-Max.750	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Yellow	CG1145
3/4	Min.650-Max.750	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Yellow	CG1190
3/4	Min.650-Max.750	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Yellow	CG11AL
3/4	Min.650-Max.750	Straight	Mesh Grip AL	Spectrum Cord Grip Conn.Aluminum with Mesh USA	Yellow	CG11ALGT
3/4	Min.650-Max.750	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Yellow	CG75B750
3/4	Min.650-Max.750	45°	S	45° Industrial Cord Grip Conn.USA	Yellow	CG75B75045
3/4	Min.650-Max.750	45°	Mesh Grip S	45° Industrial Cord Grip Conn.with Mesh USA	Yellow	CG75B75045GT
3/4	Min.650-Max.750	90°	S	90° Industrial Cord Grip Conn.USA	Yellow	CG75B75090
3/4	Min.650-Max.750	90°	Mesh Grip S	90° Industrial Cord Grip Conn.with Mesh USA	Yellow	CG75B75090GT
3/4	Min.650-Max.750	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Yellow	CG75B750AL
3/4	Min.650-Max.750	Straight	Mesh Grip S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Yellow	CG75B750GT
3/4	Min.750-Max.850	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Purple	CG12
3/4	Min.750-Max.850	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Purple	CG1245
3/4	Min.750-Max.850	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Purple	CG1290
3/4	Min.750-Max.850	Straight	AL	Spectrum Cord Grip Conn.Aluminum USA Incl. LN & SW	Purple	CG12AL
3/4	Min.750-Max.850	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Purple	CG75B850
3/4	Min.750-Max.850	45°	S	45° Industrial Cord Grip Conn.USA	Purple	CG75B85045
3/4	Min.750-Max.850	45°	Mesh Grip S	45° Industrial Cord Grip Conn.with Mesh USA	Purple	CG75B85045GT
3/4	Min.750-Max.850	90°	S	90° Industrial Cord Grip Conn.USA	Purple	CG75B85090
3/4	Min.750-Max.850	90°	Mesh Grip S	90° Industrial Cord Grip Conn.with Mesh USA	Purple	CG75B85090GT
3/4	Min.750-Max.850	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Purple	CG75B850AL
3/4	Min.750-Max.850	Straight	Mesh Grip S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Purple	CG75B850GT
3/4	Min.750-Max.875	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Grey	CG7575AM



AMFICO Cord Grip Connectors

Selection Chart by Trade Size / Cord Range

Any size, configuration, or material requirement not shown, please consult factory.

S = Alloy Steel
AL = Aluminum
SS = Stainless Steel (consult factory)
90 & 45 degree =
MI with Alloy Steel Nuts

Trade Size "	Cable Range (OD)	Configuration	Material	Description	Grommet Color Code	Cat. #
1	Min.375-Max.500	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Purple	CG37100AM
1	Min.450-Max.560	45°	S	45° Industrial Cord Grip Conn.USA	Green	CG100B56045
1	Min.450-Max.560	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Green	CG100B56045GT
1	Min.450-Max.560	90°	S	90° Industrial Cord Grip Conn.USA	Green	CG100B56090
1	Min.450-Max.560	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Green	CG100B56090GT
1	Min.450-Max.560	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Green	CG100B560AL
1	Min.450-Max.560	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Green	CG100B560GT
1	Min.450-Max.560	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Green	CG13
1	Min.450-Max.560	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Green	CG1345
1	Min.450-Max.560	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Green	CG1390
1	Min.450-Max.650	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Green	CG100B560
1	Min.500-Max.625	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Pink	CG50100AM
1	Min.560-Max.650	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Brown	CG100B650
1	Min.560-Max.650	45°	S	45° Industrial Cord Grip Conn.USA	Brown	CG100B65045
1	Min.560-Max.650	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Brown	CG100B65045GT
1	Min.560-Max.650	90°	S	90° Industrial Cord Grip Conn.USA	Brown	CG100B65090
1	Min.560-Max.650	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Brown	CG100B65090GT
1	Min.560-Max.650	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Brown	CG100B650AL
1	Min.560-Max.650	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Brown	CG100B650GT
1	Min.560-Max.650	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Brown	CG14
1	Min.560-Max.650	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Brown	CG1445
1	Min.560-Max.650	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Brown	CG1490
1	Min.625-Max.750	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Orange	CG62100AM
1	Min.650-Max.750	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Yellow	CG100B750
1	Min.650-Max.750	45°	S	45° Industrial Cord Grip Conn.USA	Yellow	CG100B75045
1	Min.650-Max.750	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Yellow	CG100B75045GT
1	Min.650-Max.750	90°	S	90° Industrial Cord Grip Conn.USA	Yellow	CG100B75090
1	Min.650-Max.750	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Yellow	CG100B75090GT
1	Min.650-Max.750	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Yellow	CG100B750AL
1	Min.650-Max.750	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Yellow	CG100B750GT
1	Min.650-Max.750	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Yellow	CG15
1	Min.650-Max.750	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Yellow	CG1545
1	Min.650-Max.750	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Yellow	CG1590
1	Min.750-Max.850	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Purple	CG100B850
1	Min.750-Max.850	45°	S	45° Industrial Cord Grip Conn.USA	Purple	CG100B85045
1	Min.750-Max.850	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Purple	CG100B85045GT
1	Min.750-Max.850	90°	S	90° Industrial Cord Grip Conn.USA	Purple	CG100B85090
1	Min.750-Max.850	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Purple	CG100B85090GT
1	Min.750-Max.850	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Purple	CG100B850AL
1	Min.750-Max.850	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Purple	CG100B850GT
1	Min.750-Max.850	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Purple	CG16
1	Min.750-Max.850	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Purple	CG1645
1	Min.750-Max.850	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Purple	CG1690
1	Min.750-Max.875	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Grey	CG75100AM
1	Min.850-Max.950	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Grey	CG100C950
1	Min.850-Max.950	45°	S	45° Industrial Cord Grip Conn.USA	Grey	CG100C95045
1	Min.850-Max.950	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Grey	CG100C95045GT
1	Min.850-Max.950	90°	S	90° Industrial Cord Grip Conn.USA	Grey	CG100C95090
1	Min.850-Max.950	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Grey	CG100C95090GT
1	Min.850-Max.950	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Grey	CG100C950AL
1	Min.850-Max.950	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Grey	CG100C950GT
1	Min.850-Max.950	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Grey	CG17
1	Min.850-Max.950	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Grey	CG1745
1	Min.850-Max.950	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Grey	CG1790
1	Min.875-Max1.000	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Red	CG87100AM
1	Min.950-Max1.050	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Black	CG100C1050
1	Min.950-Max1.050	45°	S	45° Industrial Cord Grip Conn.USA	Black	CG100C105045
1	Min.950-Max1.050	45° Mesh Grip	S	45° Industrial Cord Grip Conn.with Mesh USA	Black	CG100C105045GT
1	Min.950-Max1.050	90°	S	90° Industrial Cord Grip Conn.USA	Black	CG100C105090
1	Min.950-Max1.050	90° Mesh Grip	S	90° Industrial Cord Grip Conn.with Mesh USA	Black	CG100C105090GT
1	Min.950-Max1.050	Straight	AL	Straight Industrial Cord Grip Conn.Aluminum USA	Black	CG100C1050AL
1	Min.950-Max1.050	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Black	CG100C1050GT
1	Min.950-Max1.050	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Black	CG18
1	Min.950-Max1.050	45°	S	Spectrum 45° Cord Grip Conn.USA Incl. LN & SW	Black	CG1845
1	Min.950-Max1.050	90°	S	Spectrum 90° Cord Grip Conn.USA Incl. LN & SW	Black	CG1890
1	Min1.000-Max1.125	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton Range	Blue	CG100100AM



AMFICO Cord Grip Connectors

Selection Chart by Trade Size / Cord Range

Any size, configuration, or material requirement not shown, please consult factory.

S = Alloy Steel
AL = Aluminum
SS = Stainless Steel (consult factory)
90 & 45 degree =
MI with Alloy Steel Nuts

Trade Size "	Cable Range (OD)	Configuration	Material	Description	Grommet Color Code	Cat. #
1 1/4	Min.750-Max.850	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Purple	CG125C850
1 1/4	Min.750-Max.850	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Purple	CG125C850GT
1 1/4	Min.750-Max.850	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Purple	CG19
1 1/4	Min.750-Max.875	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Grey	CG75125AM
1 1/4	Min.850-Max.950	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Grey	CG125C950
1 1/4	Min.850-Max.950	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Grey	CG125C950GT
1 1/4	Min.850-Max.950	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Grey	CG20
1 1/4	Min.875-Max1.000	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Red	CG87125AM
1 1/4	Min.950-Max1.050	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Black	CG125D1050
1 1/4	Min.950-Max1.050	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Black	CG125D1050GT
1 1/4	Min.950-Max1.050	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Black	CG21
1 1/4	Min1.000-Max1.125	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton Range	Blue	CG100125AM
1 1/4	Min1.050-Max1.150	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Orange	CG125D1150
1 1/4	Min1.050-Max1.150	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Orange	CG125D1150GT
1 1/4	Min1.050-Max1.150	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Orange	CG22
1 1/4	Min1.125-Max1.250	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Brown	CG112125AM
1 1/4	Min1.150-Max1.250	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Red	CG125D1250
1 1/4	Min1.150-Max1.250	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Red	CG125D1250GT
1 1/4	Min1.150-Max1.250	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Red	CG23
1 1/4	Min1.250-Max1.375	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Green	CG125125AM
1 1/4	Min1.250-Max1.375	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	White	CG125D1375
1 1/4	Min1.250-Max1.375	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	White	CG125D1375GT
1 1/4	Min1.250-Max1.375	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	White	CG24
1 1/4	Min1.375-Max1.500	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Yellow	CG137125AM
1 1/2	Min.950-Max1.050	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Black	CG150D1050
1 1/2	Min.950-Max1.050	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Black	CG150D1050GT
1 1/2	Min.950-Max1.050	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Black	CG25
1 1/2	Min1.050-Max1.150	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Orange	CG150D1150
1 1/2	Min1.050-Max1.150	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Orange	CG150D1150GT
1 1/2	Min1.050-Max1.150	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Orange	CG26
1 1/2	Min1.150-Max1.250	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Red	CG150D1250
1 1/2	Min1.150-Max1.250	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Red	CG150D1250GT
1 1/2	Min1.150-Max1.250	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	Red	CG27
1 1/2	Min1.156-Max1.312	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Purple	CG115150AM
1 1/2	Min1.250-Max1.375	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	White	CG150D1375
1 1/2	Min1.250-Max1.375	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	White	CG150D1375GT
1 1/2	Min1.250-Max1.375	Straight	S	Spectrum Cord Grip Conn.Steel USA Incl. LN & SW	White	CG28
1 1/2	Min1.281-Max1.531	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Pink	CG128150AM
1 1/2	Min1.380-Max1.500	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Blue	CG150E1500
1 1/2	Min1.380-Max1.500	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Blue	CG150E1500GT
1 1/2	Min1.500-Max1.630	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Green	CG150E1630
1 1/2	Min1.630-Max1.750	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Brown	CG150E1750
1 1/2	Min1.750-Max1.880	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Purple	CG150E1880
2	Min1.250-Max1.380	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Red	CG200F1380
2	Min1.250-Max1.380	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Red	CG200F1380GT
2	Min1.380-Max1.500	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Blue	CG200F1500
2	Min1.380-Max1.500	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Blue	CG200F1500GT
2	Min1.500-Max1.630	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Green	CG200F1630
2	Min1.500-Max1.630	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Green	CG200F1630GT
2	Min1.531-Max1.780	Straight	S	AP Spec Cord Grip Conn.Steel USA- Appleton	Orange	CG153200AM
2	Min1.630-Max1.750	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Brown	CG200F1750
2	Min1.630-Max1.750	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Brown	CG200F1750GT
2	Min1.690-Max1.810	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Yellow	CG200F1810
2	Min1.690-Max1.810	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Yellow	CG200F1810GT
2	Min1.750-Max1.880	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Purple	CG200F1880
2	Min1.750-Max1.880	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Purple	CG200F1880GT
2	Min1.810-Max1.940	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	White	CG200F1940
2	Min1.810-Max1.940	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	White	CG200F1940GT
2	Min1.940-Max2.060	Straight	S	Straight Industrial Cord Grip Conn.Steel USA	Orange	CG200F2060
2	Min1.940-Max2.060	Straight Mesh Grip	S	Straight Industrial Cord Grip Conn.Steel with Mesh USA	Orange	CG200F2060GT

AMERICAN FITTINGS



Cord Connector Catalog Number Index

If you do not see a Cat # please consult with factory.

Since 1946

Cat #	Trade Size"	Product Description	Std. Qty.	Master Qty.	Wt/c	UPC
CG1	1/2	Spectrum Cord Grip Connectors Min .150- Max .250 Red	25	250	12	66236408002
CG10	3/4	Spectrum Cord Grip Connectors Min .560- Max .650 Brown	10	100	16	66236408020
CG100100AM	1	AP Spec Cord Grip Connectors - Appleton Range Min 1.000- Max 1.125 Blue	5	50	28	66236450234
CG100125AM	1 1/4	AP Spec Cord Grip Connectors - Appleton Range Min 1.000- Max 1.125 Blue	5	25	48	66236450240
CG100B560	1	Straight Industrial Cord Grip Connectors Min .450- Max .560 Green	5	50	28	66236450030
CG100B56045	1	45° Industrial Cord Grip Connectors Min .450- Max .560 Green	5	25	68	66236470030
CG100B56045GT	1	45° Industrial Cord Grip Connectors With Mesh Min .450- Max .560 Green		5	64	66236470025
CG100B56090	1	90° Industrial Cord Grip Connectors Min .450- Max .560 Green	5	25	68	66236460030
CG100B56090GT	1	90° Industrial Cord Grip Connectors With Mesh Min .450- Max .560 Green		5	64	66236460025
CG100B560AL	1	Straight Industrial Cord Grip Connectors - Aluminum Min .450- Max .560 Green	5	50	28	66236409224
CG100B560GT	1	Straight Strain Relief Connectors With Mesh Min .450- Max .560 Green		5	30	66236450025
CG100B650	1	Straight Industrial Cord Grip Connectors Min .560- Max .650 Brown	5	50	28	66236450032
CG100B65045	1	45° Industrial Cord Grip Connectors Min .560- Max .650 Brown	5	25	68	66236470032
CG100B65045GT	1	45° Industrial Cord Grip Connectors With Mesh Min .560- Max .650 Brown		5	64	66236470027
CG100B65090	1	90° Industrial Cord Grip Connectors Min .560- Max .650 Brown	5	25	68	66236460032
CG100B65090GT	1	90° Industrial Cord Grip Connectors With Mesh Min .560- Max .650 Brown		5	64	66236460027
CG100B650AL	1	Straight Industrial Cord Grip Connectors - Aluminum Min .560- Max .650 Brown	5	50	28	66236409226
CG100B650GT	1	Straight Strain Relief Connectors With Mesh Min .560- Max .650 Brown		5	30	66236450027
CG100B750	1	Straight Industrial Cord Grip Connectors Min .650- Max .750 Yellow	5	50	28	66236450034
CG100B75045	1	45° Industrial Cord Grip Connectors Min .650- Max .750 Yellow	5	25	68	66236470034
CG100B75045GT	1	45° Industrial Cord Grip Connectors With Mesh Min .650- Max .750 Yellow		5	64	66236470029
CG100B75090	1	90° Industrial Cord Grip Connectors Min .650- Max .750 Yellow	5	25	68	66236460034
CG100B75090GT	1	90° Industrial Cord Grip Connectors With Mesh Min .650- Max .750 Yellow		5	64	66236460029
CG100B750AL	1	Straight Industrial Cord Grip Connectors - Aluminum Min .650- Max .750 Yellow	5	50	28	66236409228
CG100B750GT	1	Straight Strain Relief Connectors With Mesh Min .650- Max .750 Yellow		5	30	66236450029
CG100B850	1	Straight Industrial Cord Grip Connectors Min .750- Max .850 Purple	5	50	28	66236450036
CG100B85045	1	45° Industrial Cord Grip Connectors Min .750- Max .850 Purple	5	25	68	66236470036
CG100B85045GT	1	45° Industrial Cord Grip Connectors With Mesh Min .750- Max .850 Purple		5	64	66236470031
CG100B85090	1	90° Industrial Cord Grip Connectors Min .750- Max .850 Purple	5	25	68	66236460036
CG100B85090GT	1	90° Industrial Cord Grip Connectors With Mesh Min .750- Max .850 Purple		5	64	66236460031
CG100B850AL	1	Straight Industrial Cord Grip Connectors - Aluminum Min .750- Max .850 Purple	5	50	28	66236409230
CG100B850GT	1	Straight Strain Relief Connectors With Mesh Min .750- Max .850 Purple		5	35	66236450031
CG100C1050	1	Straight Industrial Cord Grip Connectors Min .950- Max 1.050 Black	5	50	28	66236450040
CG100C105045	1	45° Industrial Cord Grip Connectors Min .950- Max 1.050 Black	5	25	68	66236470040
CG100C105045GT	1	45° Industrial Cord Grip Connectors With Mesh Min .950- Max 1.050 Black		5	64	66236470035
CG100C105090	1	90° Industrial Cord Grip Connectors Min .950- Max 1.050 Black	5	25	68	66236460040
CG100C105090GT	1	90° Industrial Cord Grip Connectors With Mesh Min .950- Max 1.050 Black		5	64	66236460035
CG100C1050AL	1	Straight Industrial Cord Grip Connectors - Aluminum Min .950- Max 1.050 Black	5	50	28	66236409234
CG100C1050GT	1	Straight Strain Relief Connectors With Mesh Min .950- Max 1.050 Black		5	31	66236450035
CG100C950	1	Straight Industrial Cord Grip Connectors Min .850- Max .950 Gray	5	50	28	66236450038
CG100C95045	1	45° Industrial Cord Grip Connectors Min .850- Max .950 Gray	5	25	68	66236470038
CG100C95045GT	1	45° Industrial Cord Grip Connectors With Mesh Min .850- Max .950 Gray		5	64	66236470033
CG100C95090	1	90° Industrial Cord Grip Connectors Min .850- Max .950 Gray	5	25	68	66236460038
CG100C95090GT	1	90° Industrial Cord Grip Connectors With Mesh Min .850- Max .950 Gray		5	64	66236460033
CG100C950AL	1	Straight Industrial Cord Grip Connectors - Aluminum Min .850- Max .950 Gray	5	50	28	66236409232
CG100C950GT	1	Straight Strain Relief Connectors With Mesh Min .850- Max .950 Gray		5	31	66236450033
CG1045	3/4	Spectrum 45° Cord Grip Connectors Min .560- Max .650 Brown	5	50	48	66236408100
CG1090	3/4	Spectrum 90° Cord Grip Connectors Min .560- Max .650 Brown	5	50	48	66236408076
CG10AL	3/4	Spectrum Cord Grip Connectors - Aluminum Min .560- Max .650 Brown	10	100	8	66236409020
CG10ALGT	3/4	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .560- Max .650 Brown		5	16	66236409019
CG11	3/4	Spectrum Cord Grip Connectors Min .650- Max .750 Yellow	10	100	19	66236408022
CG112125AM	1 1/4	AP Spec Cord Grip Connectors - Appleton Range Min 1.125- Max 1.250 Brown	5	25	48	66236450242
CG1145	3/4	Spectrum 45° Cord Grip Connectors Min .650- Max .750 Yellow	5	50	48	66236408102
CG115150AM	1 1/2	AP Spec Cord Grip Connectors - Appleton Range Min 1.156- Max 1.312 Purple	2	20	90	66236450248
CG1190	3/4	Spectrum 90° Cord Grip Connectors Min .650- Max .750 Yellow	5	50	48	66236408078
CG11AL	3/4	Spectrum Cord Grip Connectors - Aluminum Min .650- Max .750 Yellow	10	100	10	66236409022
CG11ALGT	3/4	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .650- Max .750 Yellow		5	20	66236409021
CG12	3/4	Spectrum Cord Grip Connectors Min .750- Max .850 Purple	10	100	19	66236408024
CG1245	3/4	Spectrum 45° Cord Grip Connectors Min .750- Max .850 Purple	5	50	48	66236408104
CG1250AM	1/2	AP Spec Cord Grip Connectors - Appleton Range Min .125- Max .187 Red	25	250	12	66236450200
CG125125AM	1 1/4	AP Spec Cord Grip Connectors - Appleton Range Min 1.250- Max 1.375 Green	5	25	48	66236450244
CG125C850	1 1/4	Straight Industrial Cord Grip Connectors Min .750- Max .850 Purple	5	25	48	66236450042
CG125C850GT	1 1/4	Straight Strain Relief Connectors With Mesh Min .750- Max .850 Purple		5	54	66236450037
CG125C950	1 1/4	Straight Industrial Cord Grip Connectors Min .850- Max .950 Gray	5	25	48	66236450044
CG125C950GT	1 1/4	Straight Strain Relief Connectors With Mesh Min .850- Max .950 Gray		5	54	66236450039
CG125D1050	1 1/4	Straight Industrial Cord Grip Connectors Min .950- Max 1.050 Black	5	25	48	66236450046
CG125D1050GT	1 1/4	Straight Strain Relief Connectors With Mesh Min .950- Max 1.050 Black		5	54	66236450041
CG125D1150	1 1/4	Straight Industrial Cord Grip Connectors Min 1.050- Max 1.150 Orange	5	25	48	66236450048
CG125D1150GT	1 1/4	Straight Strain Relief Connectors With Mesh Min 1.050- Max 1.150 Orange		5	54	66236450043
CG125D1250	1 1/4	Straight Industrial Cord Grip Connectors Min 1.150- Max 1.250 Red	5	25	48	66236450050
CG125D1250GT	1 1/4	Straight Strain Relief Connectors With Mesh Min 1.150- Max 1.250 Red		5	54	66236450045
CG125D1375	1 1/4	Straight Industrial Cord Grip Connectors Min 1.250- Max 1.375 White	5	25	48	66236450052

AMERICAN FITTINGS



Cord Connector Catalog Number Index

If you do not see a Cat # please consult with factory.

Since 1946

Cat #	Trade Size"	Product Description	Std. Qty.	Master Qty.	Wt/c	UPC
CG125D1375GT	1 1/4	Straight Strain Relief Connectors With Mesh Min 1.250- Max 1.375 White		5	54	66236450047
CG1275AM	3/4	AP Spec Cord Grip Connectors - Appleton Range Min .125- Max .250 Blue	10	100	16	66236450212
CG128150AM	1 1/2	AP Spec Cord Grip Connectors - Appleton Range Min 1.281- Max 1.531 Pink	2	20	90	66236450250
CG1290	3/4	Spectrum 90 ° Cord Grip Connectors Min .750- Max .850 Purple	5	50	48	66236408080
CG12AL	3/4	Spectrum Cord Grip Connectors - Aluminum Min .750- Max .850 Purple	10	100	10	66236409024
CG13	1	Spectrum Cord Grip Connectors Min .450- Max .560 Green	5	50	28	66236408026
CG1345	1	Spectrum 45 ° Cord Grip Connectors Min .450- Max .560 Green	5	25	68	66236408118
CG137125AM	1 1/4	AP Spec Cord Grip Connectors - Appleton Range Min 1.375- Max 1.500 Yellow	5	25	48	66236450246
CG1390	1	Spectrum 90 ° Cord Grip Connectors Min .450- Max .560 Green	5	25	68	66236408106
CG14	1	Spectrum Cord Grip Connectors Min .560- Max .650 Brown	5	50	28	66236408028
CG1445	1	Spectrum 45 ° Cord Grip Connectors Min .560- Max .650 Brown	5	25	68	66236408120
CG145	1/2	Spectrum 45 ° Cord Grip Connectors Min .150- Max .250 Red	10	100	26	66236408082
CG1490	1	Spectrum 90 ° Cord Grip Connectors Min .560- Max .650 Brown	5	25	68	66236408108
CG15	1	Spectrum Cord Grip Connectors Min .650- Max .750 Yellow	5	50	28	66236408030
CG150D1050	1 1/2	Straight Industrial Cord Grip Connectors Min .950- Max 1.050 Black	2	20	70	66236450054
CG150D1050GT	1 1/2	Straight Strain Relief Connectors With Mesh Min .950- Max 1.050 Black		5	80	66236450049
CG150D1150	1 1/2	Straight Industrial Cord Grip Connectors Min 1.050- Max 1.150 Orange	2	20	70	66236450056
CG150D1150GT	1 1/2	Straight Strain Relief Connectors With Mesh Min 1.050- Max 1.150 Orange		5	80	66236450051
CG150D1250	1 1/2	Straight Industrial Cord Grip Connectors Min 1.150- Max 1.250 Red	2	20	70	66236450058
CG150D1250GT	1 1/2	Straight Strain Relief Connectors With Mesh Min 1.150- Max 1.250 Red		5	80	66236450053
CG150D1375	1 1/2	Straight Industrial Cord Grip Connectors Min 1.250- Max 1.375 White	2	20	70	66236450060
CG150D1375GT	1 1/2	Straight Strain Relief Connectors With Mesh Min 1.250- Max 1.375 White		5	80	66236450055
CG150E1500	1 1/2	Straight Industrial Cord Grip Connectors Min 1.380- Max 1.500 Blue	2	20	70	66236450062
CG150E1500GT	1 1/2	Straight Strain Relief Connectors With Mesh Min 1.380- Max 1.500 Blue		5	80	66236450057
CG150E1630	1 1/2	Straight Industrial Cord Grip Connectors Min 1.500- Max 1.630 Green	2	20	70	66236450064
CG150E1750	1 1/2	Straight Industrial Cord Grip Connectors Min 1.630- Max 1.750 Brown	2	20	70	66236450066
CG150E1880	1 1/2	Straight Industrial Cord Grip Connectors Min 1.750- Max 1.880 Purple	2	20	70	66236450068
CG153200AM	2	AP Spec Cord Grip Connectors - Appleton Range Min 1.531- Max 1.780 Orange	2	20	105	66236450252
CG1545	1	Spectrum 45 ° Cord Grip Connectors Min .650- Max .750 Yellow	5	25	68	66236408122
CG1590	1	Spectrum 90 ° Cord Grip Connectors Min .650- Max .750 Yellow	5	25	68	66236408110
CG16	1	Spectrum Cord Grip Connectors Min .750- Max .850 Purple	5	50	28	66236408032
CG1645	1	Spectrum 45 ° Cord Grip Connectors Min .750- Max .850 Purple	5	25	68	66236408124
CG1690	1	Spectrum 90 ° Cord Grip Connectors Min .750- Max .850 Purple	5	25	68	66236408112
CG17	1	Spectrum Cord Grip Connectors Min .850- Max .950 Gray	5	50	28	66236408034
CG1745	1	Spectrum 45 ° Cord Grip Connectors Min .850- Max .950 Gray	5	25	68	66236408126
CG1790	1	Spectrum 90 ° Cord Grip Connectors Min .850- Max .950 Gray	5	25	68	66236408114
CG18	1	Spectrum Cord Grip Connectors Min .950- Max 1.050 Black	5	50	28	66236408036
CG1845	1	Spectrum 45 ° Cord Grip Connectors Min .950- Max 1.050 Black	5	25	68	66236408128
CG1850AM	1/2	AP Spec Cord Grip Connectors - Appleton Range Min .187- Max .312 Brown	25	250	12	66236450202
CG1890	1	Spectrum 90 ° Cord Grip Connectors Min .950- Max 1.050 Black	5	25	68	66236408116
CG19	1 1/4	Spectrum Cord Grip Connectors Min .750- Max .850 Purple	5	50	48	66236408038
CG190	1/2	Spectrum 90 ° Cord Grip Connectors Min .150- Max .250 Red	10	100	26	66236408058
CG1AL	1/2	Spectrum Cord Grip Connectors - Aluminum Min .150- Max .250 Red	25	250	6	66236409002
CG1ALGT	1/2	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .150- Max .250 Red		5	8	66236409001
CG2	1/2	Spectrum Cord Grip Connectors Min .250- Max .350 White	25	250	12	66236408004
CG20	1 1/4	Spectrum Cord Grip Connectors Min .850- Max .950 Gray	5	50	48	66236408040
CG200F1380	2	Straight Industrial Cord Grip Connectors Min 1.250- Max 1.380 Red	2	20	100	66236450070
CG200F1380GT	2	Straight Strain Relief Connectors With Mesh Min 1.250- Max 1.380 Red		5	120	66236450065
CG200F1500	2	Straight Industrial Cord Grip Connectors Min 1.380- Max 1.500 Blue	2	20	100	66236450072
CG200F1500GT	2	Straight Strain Relief Connectors With Mesh Min 1.380- Max 1.500 Blue		5	120	66236450067
CG200F1630	2	Straight Industrial Cord Grip Connectors Min 1.500- Max 1.630 Green	2	20	100	66236450074
CG200F1630GT	2	Straight Strain Relief Connectors With Mesh Min 1.500- Max 1.630 Green		5	120	66236450069
CG200F1750	2	Straight Industrial Cord Grip Connectors Min 1.630- Max 1.750 Brown	2	20	100	66236450076
CG200F1750GT	2	Straight Strain Relief Connectors With Mesh Min 1.630- Max 1.750 Brown		5	120	66236450071
CG200F1810	2	Straight Industrial Cord Grip Connectors Min 1.690- Max 1.810 Yellow	2	20	100	66236450078
CG200F1810GT	2	Straight Strain Relief Connectors With Mesh Min 1.690- Max 1.810 Yellow		5	120	66236450073
CG200F1880	2	Straight Industrial Cord Grip Connectors Min 1.750- Max 1.880 Purple	2	20	100	66236450080
CG200F1880GT	2	Straight Strain Relief Connectors With Mesh Min 1.750- Max 1.880 Purple		5	120	66236450075
CG200F1940	2	Straight Industrial Cord Grip Connectors Min 1.810- Max 1.940 White	2	20	100	66236450082
CG200F1940GT	2	Straight Strain Relief Connectors With Mesh Min 1.810- Max 1.940 White		5	120	66236450077
CG200F2060	2	Straight Industrial Cord Grip Connectors Min 1.940- Max 2.060 Orange	2	20	100	66236450084
CG200F2060GT	2	Straight Strain Relief Connectors With Mesh Min 1.940- Max 2.060 Orange		5	120	66236450079
CG21	1 1/4	Spectrum Cord Grip Connectors Min .950- Max 1.050 Black	5	50	48	66236408042
CG22	1 1/4	Spectrum Cord Grip Connectors Min 1.050- Max 1.150 Orange	5	50	48	66236408044
CG23	1 1/4	Spectrum Cord Grip Connectors Min 1.150- Max 1.250 Red	5	50	48	66236408046
CG24	1 1/4	Spectrum Cord Grip Connectors Min 1.250- Max 1.375 White	5	50	48	66236408048
CG245	1/2	Spectrum 45 ° Cord Grip Connectors Min .250- Max .350 White	10	100	26	66236408084
CG25	1 1/2	Spectrum Cord Grip Connectors Min .950- Max 1.050 Black	2	20	90	66236408050
CG2575AM	3/4	AP Spec Cord Grip Connectors - Appleton Range Min .250- Max .375 Green	10	100	16	66236450214
CG26	1 1/2	Spectrum Cord Grip Connectors Min 1.050- Max 1.150 Orange	2	20	90	66236408052
CG27	1 1/2	Spectrum Cord Grip Connectors Min 1.150- Max 1.250 Red	2	20	90	66236408054
CG28	1 1/2	Spectrum Cord Grip Connectors Min 1.250- Max 1.375 White	2	20	90	66236408056

AMERICAN FITTINGS



Cord Connector Catalog Number Index

If you do not see a Cat # please consult with factory.

Since 1946

Cat #	Trade Size"	Product Description	Std. Qty.	Master Qty.	Wt/c	UPC
CG290	1/2	Spectrum 90 ° Cord Grip Connectors Min .250- Max .350 White	10	100	26	66236408060
CG2AL	1/2	Spectrum Cord Grip Connectors - Aluminum Min .250- Max .350 White	25	250	6	66236409004
CG2ALGT	1/2	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .250- Max .350 White		5	8	66236409003
CG3	1/2	Spectrum Cord Grip Connectors Min .350- Max .450 Blue	25	250	12	66236408006
CG3150AM	1/2	AP Spec Cord Grip Connectors - Appleton Range Min .312- Max .437 Yellow	25	250	12	66236450204
CG345	1/2	Spectrum 45 ° Cord Grip Connectors Min .350- Max .450 Blue	10	100	26	66236408086
CG37100AM	1	AP Spec Cord Grip Connectors - Appleton Range Min .375- Max .500 Purple	5	50	28	66236450224
CG3750AM	1/2	AP Spec Cord Grip Connectors - Appleton Range Min .375- Max .500 Purple	25	250	12	66236450206
CG3775AM	3/4	AP Spec Cord Grip Connectors - Appleton Range Min .375- Max .500 Purple	10	100	16	66236450216
CG390	1/2	Spectrum 90 ° Cord Grip Connectors Min .350- Max .450 Blue	10	100	26	66236408062
CG3AL	1/2	Spectrum Cord Grip Connectors - Aluminum Min .350- Max .450 Blue	25	250	6	66236409006
CG3ALGT	1/2	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .350- Max .450 Blue		5	8	66236409005
CG4	1/2	Spectrum Cord Grip Connectors Min .450- Max .560 Green	25	250	12	66236408008
CG445	1/2	Spectrum 45 ° Cord Grip Connectors Min .450- Max .560 Green	10	100	26	66236408088
CG490	1/2	Spectrum 90 ° Cord Grip Connectors Min .450- Max .560 Green	10	100	26	66236408064
CG4AL	1/2	Spectrum Cord Grip Connectors - Aluminum Min .450- Max .560 Green	25	250	6	66236409008
CG4ALGT	1/2	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .450- Max .560 Green		5	8	66236409007
CG5	1/2	Spectrum Cord Grip Connectors Min .560- Max .650 Brown	25	250	12	66236408010
CG50100AM	1	AP Spec Cord Grip Connectors - Appleton Range Min .500- Max .625 Pink	5	50	28	66236450226
CG5050AM	1/2	AP Spec Cord Grip Connectors - Appleton Range Min .500- Max .625 Pink	25	250	12	66236450208
CG5075AM	3/4	AP Spec Cord Grip Connectors - Appleton Range Min .500- Max .625 Pink	10	100	16	66236450218
CG50A222H	1/2	Cord Grip Connectors With Multiple Hole Bushings	25	250	12	66236450100
CG50A223H	1/2	Cord Grip Connectors With Multiple Hole Bushings	25	250	12	66236450102
CG50A250	1/2	Straight Industrial Cord Grip Connectors Min .150- Max .250 Red	25	250	12	66236450002
CG50A25045	1/2	45° Industrial Cord Grip Connectors Min .150- Max .250 Red	10	100	26	66236470002
CG50A25045GT	1/2	45° Industrial Cord Grip Connectors With Mesh Min .150- Max .250 Red		5	25	66236470001
CG50A25090	1/2	90 ° Industrial Cord Grip Connectors Min .150- Max .250 Red	10	100	26	66236460002
CG50A25090GT	1/2	90° Industrial Cord Grip Connectors With Mesh Min .150- Max .250 Red		5	25	66236460001
CG50A250AL	1/2	Straight Industrial Cord Grip Connectors - Aluminum Min .150- Max .250 Red	25	250	6	66236409200
CG50A250GT	1/2	Straight Strain Relief Connectors With Mesh Min .150- Max .250 Red		5	13	66236450001
CG50A350	1/2	Straight Industrial Cord Grip Connectors Min .250- Max .350 White	25	250	12	66236450004
CG50A35045	1/2	45° Industrial Cord Grip Connectors Min .250- Max .350 White	10	100	26	66236470004
CG50A35045GT	1/2	45° Industrial Cord Grip Connectors With Mesh Min .250- Max .350 White		5	25	66236470003
CG50A35090	1/2	90 ° Industrial Cord Grip Connectors Min .250- Max .350 White	10	100	26	66236460004
CG50A350AL	1/2	Straight Industrial Cord Grip Connectors - Aluminum Min .250- Max .350 White	25	250	6	66236409202
CG50A350GT	1/2	Straight Strain Relief Connectors With Mesh Min .250- Max .350 White		5	13	66236450003
CG50A450	1/2	Straight Industrial Cord Grip Connectors Min .350- Max .450 Blue	25	250	12	66236450006
CG50A45045	1/2	45° Industrial Cord Grip Connectors Min .350- Max .450 Blue	10	100	26	66236470006
CG50A45045GT	1/2	45° Industrial Cord Grip Connectors With Mesh Min .350- Max .450 Blue		5	25	66236470005
CG50A45090	1/2	90 ° Industrial Cord Grip Connectors Min .350- Max .450 Blue	10	100	26	66236460006
CG50A45090GT	1/2	90° Industrial Cord Grip Connectors With Mesh Min .350- Max .450 Blue		5	25	66236460005
CG50A450AL	1/2	Straight Industrial Cord Grip Connectors - Aluminum Min .350- Max .450 Blue	25	250	6	66236409204
CG50A450GT	1/2	Straight Strain Relief Connectors With Mesh Min .350- Max .450 Blue		5	13	66236450005
CG50A560	1/2	Straight Industrial Cord Grip Connectors Min .450- Max .560 Green	25	250	12	66236450008
CG50A56045	1/2	45° Industrial Cord Grip Connectors Min .450- Max .560 Green	10	100	26	66236470008
CG50A56045GT	1/2	45° Industrial Cord Grip Connectors With Mesh Min .450- Max .560 Green		5	25	66236470007
CG50A56090	1/2	90 ° Industrial Cord Grip Connectors Min .450- Max .560 Green	10	100	26	66236460008
CG50A56090GT	1/2	90° Industrial Cord Grip Connectors With Mesh Min .450- Max .560 Green		5	25	66236460007
CG50A560AL	1/2	Straight Industrial Cord Grip Connectors - Aluminum Min .450- Max .560 Green	25	250	6	66236409206
CG50A560GT	1/2	Straight Strain Relief Connectors With Mesh Min .450- Max .560 Green		5	13	66236450007
CG50A650	1/2	Straight Industrial Cord Grip Connectors Min .560- Max .650 Brown	25	250	12	66236450010
CG50A65045	1/2	45° Industrial Cord Grip Connectors Min .560- Max .650 Brown	10	100	26	66236470010
CG50A65045GT	1/2	45° Industrial Cord Grip Connectors With Mesh Min .560- Max .650 Brown		5	25	66236470009
CG50A65090	1/2	90 ° Industrial Cord Grip Connectors Min .560- Max .650 Brown	10	100	26	66236460010
CG50A65090GT	1/2	90° Industrial Cord Grip Connectors With Mesh Min .560- Max .650 Brown		5	25	66236460009
CG50A650AL	1/2	Straight Industrial Cord Grip Connectors - Aluminum Min .560- Max .650 Brown	25	250	6	66236409208
CG50A650GT	1/2	Straight Strain Relief Connectors With Mesh Min .560- Max .650 Brown		5	13	66236450009
CG545	1/2	Spectrum 45 ° Cord Grip Connectors Min .560- Max .650 Brown	10	100	26	66236408090
CG590	1/2	Spectrum 90 ° Cord Grip Connectors Min .560- Max .650 Brown	10	100	26	66236408066
CG5AL	1/2	Spectrum Cord Grip Connectors - Aluminum Min .560- Max .650 Brown	25	250	6	66236409010
CG5ALGT	1/2	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .560- Max .650 Brown		5	8	66236409009
CG6	3/4	Spectrum Cord Grip Connectors Min .150- Max .250 Red	10	100	16	66236408012
CG62100AM	1	AP Spec Cord Grip Connectors - Appleton Range Min .625- Max .750 Orange	5	50	28	66236450228
CG6250AM	1/2	AP Spec Cord Grip Connectors - Appleton Range Min .625- Max .750 Orange	25	250	12	66236450210
CG6275AM	3/4	AP Spec Cord Grip Connectors - Appleton Range Min .625- Max .750 Orange	10	100	19	66236450220
CG645	3/4	Spectrum 45 ° Cord Grip Connectors Min .150- Max .250 Red	5	50	48	66236408092
CG690	3/4	Spectrum 90 ° Cord Grip Connectors Min .150- Max .250 Red	5	50	48	66236408068
CG6AL	3/4	Spectrum Cord Grip Connectors - Aluminum Min .150- Max .250 Red	10	100	8	66236409012
CG6ALGT	3/4	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .150- Max .250 Red		5	12	66236409011
CG7	3/4	Spectrum Cord Grip Connectors Min .250- Max .350 White	10	100	16	66236408014
CG745	3/4	Spectrum 45 ° Cord Grip Connectors Min .250- Max .350 White	5	50	48	66236408094
CG75100AM	1	AP Spec Cord Grip Connectors - Appleton Range Min .750- Max .875 Gray	5	50	28	66236450230

AMERICAN FITTINGS



Cord Connector Catalog Number Index

If you do not see a Cat # please consult with factory.


Since 1946

Cat #	Trade Size"	Product Description	Std. Qty.	Master Qty.	Wt/c	UPC
CG75125AM	1 1/4	AP Spec Cord Grip Connectors - Appleton Range Min .750- Max .875 Gray	5	25	48	66236450236
CG7575AM	3/4	AP Spec Cord Grip Connectors - Appleton Range Min .750- Max .875 Gray	10	100	19	66236450222
CG75A2222H	3/4	Cord Grip Connectors With Multiple Hole Bushings	10	100	10	66236450104
CG75A2223H	3/4	Cord Grip Connectors With Multiple Hole Bushings	10	100	10	66236450106
CG75A250	3/4	Straight Industrial Cord Grip Connectors Min .150- Max .250 Red	10	100	16	66236450014
CG75A25045	3/4	45° Industrial Cord Grip Connectors Min .150- Max .250 Red	5	50	48	66236470014
CG75A25045GT	3/4	45° Industrial Cord Grip Connectors With Mesh Min .150- Max .250 Red		5	40	66236470011
CG75A25090	3/4	90° Industrial Cord Grip Connectors Min .150- Max .250 Red	5	50	48	66236460014
CG75A25090GT	3/4	90° Industrial Cord Grip Connectors With Mesh Min .150- Max .250 Red		5	40	66236460011
CG75A250AL	3/4	Straight Industrial Cord Grip Connectors - Aluminum Min .150- Max .250 Red	10	100	16	66236409210
CG75A250GT	3/4	Straight Strain Relief Connectors With Mesh Min .150- Max .250 Red		5	17	66236450011
CG75A350	3/4	Straight Industrial Cord Grip Connectors Min .250- Max .350 White	10	100	16	66236450016
CG75A35045	3/4	45° Industrial Cord Grip Connectors Min .250- Max .350 White	5	50	48	66236470016
CG75A35045GT	3/4	45° Industrial Cord Grip Connectors With Mesh Min .250- Max .350 White		5	40	66236470013
CG75A35090	3/4	90° Industrial Cord Grip Connectors Min .250- Max .350 White	5	50	48	66236460016
CG75A35090GT	3/4	90° Industrial Cord Grip Connectors With Mesh Min .250- Max .350 White		5	40	66236460013
CG75A350AL	3/4	Straight Industrial Cord Grip Connectors - Aluminum Min .250- Max .350 White	10	100	16	66236409212
CG75A350GT	3/4	Straight Strain Relief Connectors With Mesh Min .250- Max .350 White		5	17	66236450013
CG75A450	3/4	Straight Industrial Cord Grip Connectors Min .350- Max .450 Blue	10	100	16	66236450018
CG75A45045	3/4	45° Industrial Cord Grip Connectors Min .350- Max .450 Blue	5	50	48	66236470018
CG75A45045GT	3/4	45° Industrial Cord Grip Connectors With Mesh Min .350- Max .450 Blue		5	40	66236470015
CG75A45090	3/4	90° Industrial Cord Grip Connectors Min .350- Max .450 Blue	5	50	48	66236460018
CG75A45090GT	3/4	90° Industrial Cord Grip Connectors With Mesh Min .350- Max .450 Blue		5	40	66236460015
CG75A450AL	3/4	Straight Industrial Cord Grip Connectors - Aluminum Min .350- Max .450 Blue	10	100	16	66236409214
CG75A450GT	3/4	Straight Strain Relief Connectors With Mesh Min .350- Max .450 Blue		5	17	66236450015
CG75A560	3/4	Straight Industrial Cord Grip Connectors Min .450- Max .560 Green	10	100	16	66236450020
CG75A56045	3/4	45° Industrial Cord Grip Connectors Min .450- Max .560 Green	5	50	48	66236470020
CG75A56045GT	3/4	45° Industrial Cord Grip Connectors With Mesh Min .450- Max .560 Green		5	40	66236470017
CG75A56090	3/4	90° Industrial Cord Grip Connectors Min .450- Max .560 Green	5	50	48	66236460020
CG75A56090GT	3/4	90° Industrial Cord Grip Connectors With Mesh Min .450- Max .560 Green		5	40	66236460017
CG75A560AL	3/4	Straight Industrial Cord Grip Connectors - Aluminum Min .450- Max .560 Green	10	100	16	66236409216
CG75A560GT	3/4	Straight Strain Relief Connectors With Mesh Min .450- Max .560 Green		5	17	66236450017
CG75A650	3/4	Straight Industrial Cord Grip Connectors Min .560- Max .650 Brown	10	100	16	66236450022
CG75A65045	3/4	45° Industrial Cord Grip Connectors Min .560- Max .650 Brown	5	50	48	66236470022
CG75A65045GT	3/4	45° Industrial Cord Grip Connectors With Mesh Min .560- Max .650 Brown		5	40	66236470019
CG75A65090	3/4	90° Industrial Cord Grip Connectors Min .560- Max .650 Brown	5	50	48	66236460022
CG75A65090GT	3/4	90° Industrial Cord Grip Connectors With Mesh Min .560- Max .650 Brown		5	40	66236460019
CG75A650AL	3/4	Straight Industrial Cord Grip Connectors - Aluminum Min .560- Max .650 Brown	10	100	16	66236409218
CG75A650GT	3/4	Straight Strain Relief Connectors With Mesh Min .560- Max .650 Brown		5	17	66236450019
CG75B750	3/4	Straight Industrial Cord Grip Connectors Min .650- Max .750 Yellow	10	100	19	66236450026
CG75B75045	3/4	45° Industrial Cord Grip Connectors Min .650- Max .750 Yellow	5	50	48	66236470026
CG75B75045GT	3/4	45° Industrial Cord Grip Connectors With Mesh Min .650- Max .750 Yellow		5	40	66236470021
CG75B75090	3/4	90° Industrial Cord Grip Connectors Min .650- Max .750 Yellow	5	50	48	66236460026
CG75B75090GT	3/4	90° Industrial Cord Grip Connectors With Mesh Min .650- Max .750 Yellow		5	40	66236460021
CG75B750AL	3/4	Straight Industrial Cord Grip Connectors - Aluminum Min .650- Max .750 Yellow	10	100	19	66236409220
CG75B750GT	3/4	Straight Strain Relief Connectors With Mesh Min .650- Max .750 Yellow		5	18	66236450021
CG75B850	3/4	Straight Industrial Cord Grip Connectors Min .750- Max .850 Purple	10	100	19	66236450028
CG75B85045	3/4	45° Industrial Cord Grip Connectors Min .750- Max .850 Purple	5	50	48	66236470028
CG75B85045GT	3/4	45° Industrial Cord Grip Connectors With Mesh Min .750- Max .850 Purple		5	40	66236470023
CG75B85090	3/4	90° Industrial Cord Grip Connectors Min .750- Max .850 Purple	5	50	48	66236460028
CG75B85090GT	3/4	90° Industrial Cord Grip Connectors With Mesh Min .750- Max .850 Purple		5	40	66236460023
CG75B850AL	3/4	Straight Industrial Cord Grip Connectors - Aluminum Min .750- Max .850 Purple	10	100	19	66236409222
CG75B850GT	3/4	Straight Strain Relief Connectors With Mesh Min .750- Max .850 Purple		5	18	66236450023
CG790	3/4	Spectrum 90° Cord Grip Connectors Min .250- Max .350 White	5	50	48	66236480070
CG7AL	3/4	Spectrum Cord Grip Connectors - Aluminum Min .250- Max .350 White	10	100	8	66236409014
CG7ALGT	3/4	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .250- Max .350 White		5	12	66236409013
CG8	3/4	Spectrum Cord Grip Connectors Min .350- Max .450 Blue	10	100	16	66236408016
CG845	3/4	Spectrum 45° Cord Grip Connectors Min .350- Max .450 Blue	5	50	48	66236408096
CG87100AM	1	AP Spec Cord Grip Connectors - Appleton Range Min .875- Max 1.000 Red	5	50	28	66236450232
CG87125AM	1 1/4	AP Spec Cord Grip Connectors - Appleton Range Min .875- Max 1.000 Red	5	25	48	66236450238
CG890	3/4	Spectrum 90° Cord Grip Connectors Min .350- Max .450 Blue	5	50	48	66236408072
CG8AL	3/4	Spectrum Cord Grip Connectors - Aluminum Min .350- Max .450 Blue	10	100	8	66236409016
CG8ALGT	3/4	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .350- Max .450 Blue		5	12	66236409015
CG9	3/4	Spectrum Cord Grip Connectors Min .450- Max .560 Green	10	100	16	66236408018
CG945	3/4	Spectrum 45° Cord Grip Connectors Min .450- Max .560 Green	5	50	48	66236408098
CG990	3/4	Spectrum 90° Cord Grip Connectors Min .450- Max .560 Green	5	50	48	66236408074
CG9AL	3/4	Spectrum Cord Grip Connectors - Aluminum Min .450- Max .560 Green	10	100	8	66236409018
CG9ALGT	3/4	Spectrum Cord Grip Connectors - Aluminum With Mesh Min .450- Max .560 Green		5	16	66236409017
UF50	1/2	Underground Feeder Cable Connectors	25	250	12	66236469000
UF5075	3/4	Underground Feeder Cable Connectors	25	100	18	66236469001
UF75	3/4	Underground Feeder Cable Connectors	10	100	18	66236469002

For a catalog number not shown or for stainless steel connectors please consult factory.

We Are the Perfect Connection for

Agriculture
Alternative Energy
Data Centers
Federal & State Projects
Food Processing & Production
Hospitals and Medical Centers
Industrial Applications

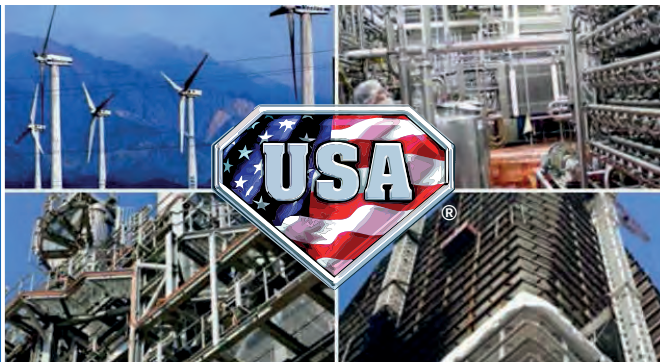

Infrastructure Construction
Military Bases
OEM Equipment
Oil & Gas Projects
Paper & Pulp
Transportation
Waste Water Treatment

Innovating the Next Generation of Electrical Fittings

Founded in 1946, a family owned and operated, 3rd generation business, we have grown into the world's largest manufacturer of alloy steel electrical fittings. Headquartered in New Jersey, all products are sold exclusively through Authorized Stocking Distributors. Our products are made in the USA, and they will exceed your requirements and expectations, not your budget. We never apologize why our products are made in America; we suggest you ask our competitors "why they don't"! Random lot shipping inspection in a foreign country can never replace integrity manufactured into raw materials and manufacturing in this country. Don't consider us as just a government project supplier, consider us as your fitting supplier for all types of projects.

Who says, integrity and quality of products have to be expensive?

Discover our product differentiators, reduction in your installation time, and improvement in your application. . . **We Guarantee It!**

We Are the **ONLY** Manufacturer of a
Full Range of Steel Electrical Fittings
Made in the USA

Request Our Full-Line Catalog or
AMFICO Ground Hub Brochure
Cord Connectors Catalog
EMT Fittings Catalog
Liquid Tight Fittings Catalog
Rigid Conduit Products Catalog
SPECflex™ FMC Connector Catalog
Accessories Catalog
Product Samples

AMFICO™
Made in the USA Since 1946



Sold Exclusively Through Authorized Distributors



Manufacturing and Corporate Offices
AMERICAN FITTINGS Corporation
17-10 Willow Street Fair Lawn, NJ 07410
t: 800.221.5268 | f: 201.664.1175

Online: amftgs.com e: info@amftgs.com



Quality has one name, AMERICAN